


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Get more evenly distributed lighting with this knife-edged LED architectural-grade product. Our sharp-edged extrusion attaches to heavy gauge steel wall brackets or a special extension, affording on-board driver installation and 1/2" or 5/8" thick drywall on its underside.

FEATURES

- Construction:** Durable anodized aluminum
- Driver:** Remote 4N1 series
(Compatible with most TRIAC, ELV, MLV & 0-10V Dimmers)
- Voltage:** 24V DC constant voltage
- Lens:** Frosted for even distribution
- CRI:** 95+
- Life:** 50,000 hours
- Operating Temperature:** -40°F to +122°F
- Warranty:** 5 years carefree for parts & components (labor not included)
- Listings:** cULus Listed, IP54-Rated (Indoor)

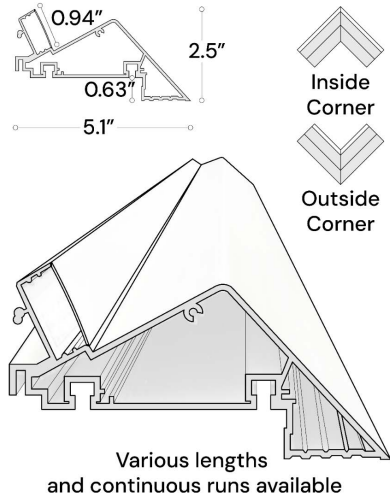

Alcon 12100-52 Surface-Mounted Linear Knife Edge Cove LED Light

ORDERING INFORMATION Example: (12100-52-L6-S-8-30K-WH-010)

Model	Lumens Wattage	Shape	Specify Length 2', 3', 4', 6' or 8'	Color Temp	Finish	Application
12100-52 Knife Edge Cove Surface	L1 210 lm 3W	S Single Run	Single Run	27K 2700K	WH White	C Standard Cove
	L2 315 lm 4.4W	CR Continuous Run				
	L3 698 lm 6.6W	RC Rectangle	Rectangle	35K 3500K	BZ Bronze	
		SQ Square	Specify Length	40K 4000K	SL Silver	
			Specify Run Length in Feet	50K 5000K		
			W L			
			W L			



Outside Corner

Used for floating ceiling application



Inside Corner

Used for standard cove ceiling application

COLOR TEMPERATURE GUIDE



