

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Offering field-adjustable color temperature switching, our direct/indirect ultra-thin pendant features a unique design that provides both energy efficiency and style. While a center semitransparent diffuser contributes to uplight distribution, a frosted or louvered lensed bottom provides downlight.

DETAILS

Construction: Extruded aluminum housing.
Mounting: Pendant mounting with 4FT adjustable aircraft cable
Finish: Silver
Wattage: 40W
Lumen: 4000 Lumen
Delivered Lumen: 4207 Lumen
Color Temperature: Color temperature switch is capable of switching from 3000K/3500K/4000K
Voltage: 120V-277V, 50/60Hz
Dimming: 0-10V Dimmable
CRI: 90+
Life: 50,000 Hours
Warranty: 5 years Carefree for parts & components (Labor not included)
Listings: UL, Damp Location Rated.





Alcon Lighting 12138 Slim LED Direct and Indirect Linear Light

ORDERING INFORMATION Example: (12138-F-T15)

Model	Length	Lens	Pendant Ceiling Type
12138	4 Foot	F Frosted	T9 9/16" Grid T-bar
g ¹	8 Foot	L Louvered	T15 15/16" Grid T-bar
12 ²	12 Foot		H Hard / Dry Wall
CRx ³	Continuous Run x = Length in feet		

¹ 8 Ft. fixture is a continuous row made of two, 4 Ft. fixtures
² 12 Ft. fixture is a continuous row made of three, 4 Ft. fixtures
³ Field installed for continuous row applications in 4 Ft. increments.
 Continuous run can max be connected up to 40ft in run or 10 fixtures total.



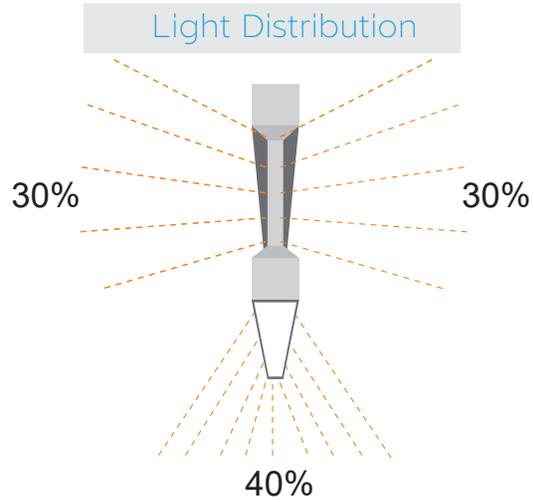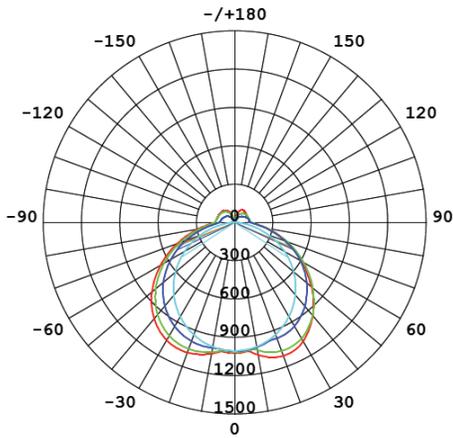

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X