



Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Available as a pendant, surface or wall mount, our ultra-thin LED fixture features a unique design that provides both energy efficiency and style. Offering field-adjustable color temperature switching, this fixture is suitable for applications such as office, banking, retail and classrooms.

FEATURES

- Construction:** Extruded aluminum housing.
- Mounting:** Pendant, wall and surface options available. Pendant mounting includes 4FT adjustable aircraft cable.
- Finish:** White
- Color Temperature:** Color temperature switch is capable of switching from 3000K/3500K/4000K
- Voltage:** 120V-277V, 50/60Hz
- Dimming:** 0-10V Dimmable
- CRI:** 90+
- Life:** 50,000 Hours
- Warranty:** 5 years Carefree for parts & components (Labor not included)
- Listings:** UL, Damp Location Rated.

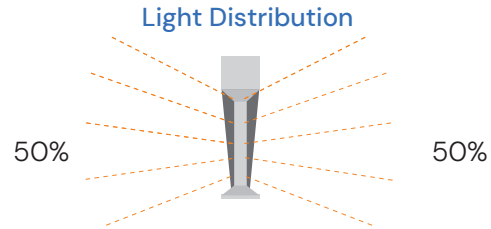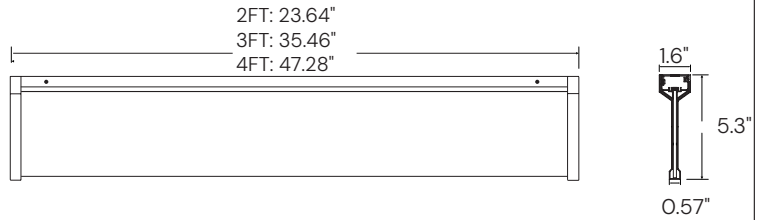

Size	Wattage	Lumen	Delivered Lumen
2FT	20W	2000 lm	2513 lm
3FT	20/30/40W	2000/3000/4000 lm	2509/3804/5097 lm
4FT			2369/3624/4880 lm



Ordering code example: [12139-P-4-H](#)

Model	Mount	Length Wattage Lumen	Pendant Ceiling Type
12139	P Pendant	2 2FT 20W 2000lm	(Blank) Not Required
	W Wall	3 3FT Switchable Wattage Switchable Lumen	T9² 9/16" Grid T-bar
	S Surface Drywall	4 4FT Switchable Wattage Switchable Lumen	T15 15/16" Grid T-bar
	ST¹ Surface for T-Grid		SC² Screw Slot
			H Hard / Dry Wall
			SH Sloped Hard / Dry Wall

¹ Mounting hardware provided.
² J-box and T-grid clips are included

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X