


INSTALLATION INSTRUCTIONS

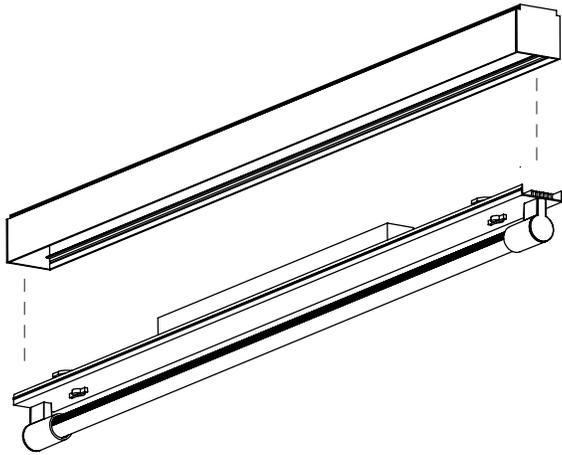


WARNING: disconnect main power at the source prior to installation!

Only qualified electricians should install Alcon Lighting products.

The swing rail housing can be surface mounted to any structure and fed directly with conduit or attach to a J-box with the SW200 box cover option.

Additionally the rail housing can be suspended from aircraft cable on adjustable cable grippers (SAC option) and fed with a power cord from a box mounted canopy (SPF option)

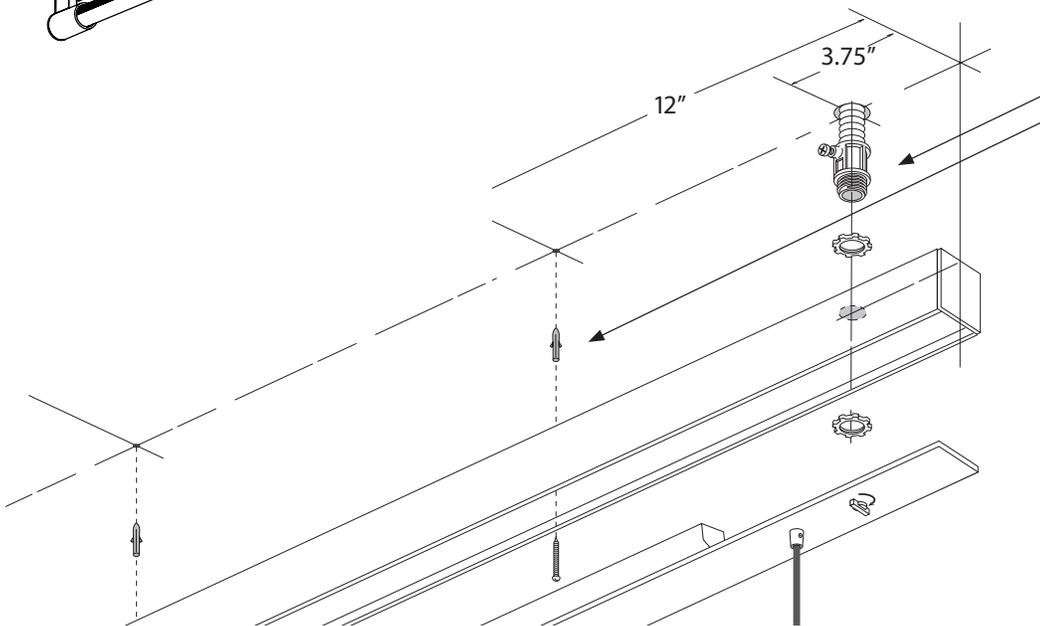

- 1/2" conduit fitting, by others
- Use anchors and wood screws provided to mount rail to structure. Additional holes can be drilled into rail for mounting.

Use spacers provided when using **optional** box cover

Optional box cover

