

12168-11 INSTALLATION INSTRUCTIONS

General and Additional Markings

1. For use only with a certified driver.
2. Dry locations only.

Installation Instructions

- 1) **Grounding:** All grounding must be done in accordance with the Canadian Electrical Code (CEC) – Part 1.
- 2) **Safety Warning:** Risk of Fire or Electric Shock: Do not modify the luminaire or its electrical components, including altering or creating new openings in the wiring compartment. Do not add or change any ballasts or other electrical components.
- 3) **Qualified Personnel Required:** The installation of this fixture requires a person familiar with the construction and operation of luminaire electrical systems. If you are not qualified, do not attempt to install it. Contact a qualified electrician.
- 4) **Power Disconnection:** Always turn off the power at the circuit breaker or fuse box before beginning the installation.
- 5) **Retain Instructions:** Keep these instructions for future reference.




12168-11 INSTALLATION INSTRUCTIONS

PARTS:

- LED unit x 1
- Canopy x 1
- Mounting Bracket
- Socket head screws x 14
- Safety Cables
- Mounting fasteners (not provided)

- 1) Connect fixture wires to low voltage wiring (Remote Driver)
- 2) Align bracket to electrical box for electrical wires to pass.
- 3) It is necessary that fixture is secured to wood blocking (not provided) to support approximately 50 lbs.
- 4) Mount bracket to the wood blocking with fasteners (not provided).
- 5) Use anchor wires to secure canopy to mounting bracket for extra support.
- 6) Align canopy to bracket and tighten screws (provided) on all side.

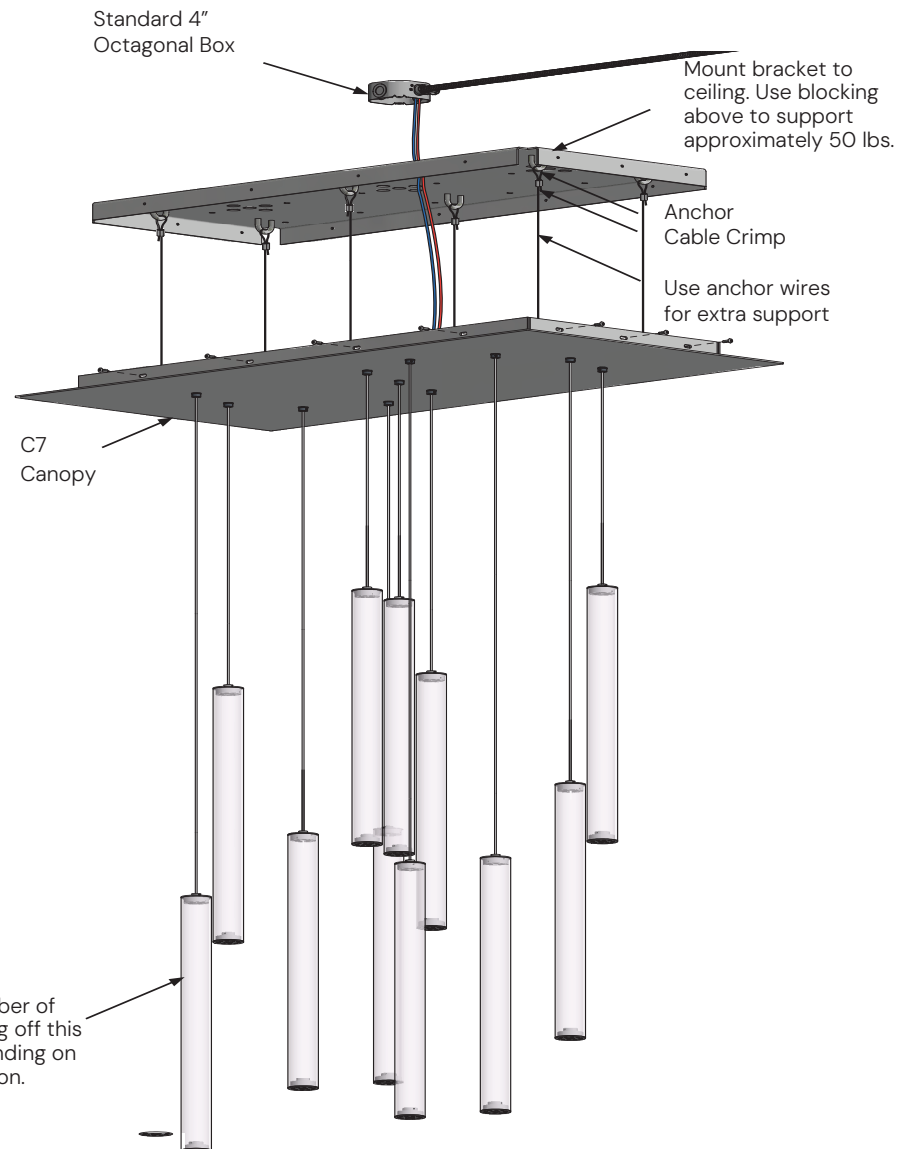

12168-11 INSTALLATION INSTRUCTIONS

- 1) Cut coax wire to desired length.
- 2) Unbraid outer woven wire to expose 1/2" (13mm) of inner wire. Twist outer strands tightly together.
- 3) Strip 1/8" (3mm) of insulation from inner wire.
- 4) Remove setscrew on canopy.
- 5) Make sure strain relief is in place in the center hole and pull wire through canopy.
- 6) Tighten setscrew when pendant is adjusted to desired height.

