

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Alcon Lighting RFT Commercial LED Linear Recessed Direct Down Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

2FT | W 4" x L 24" x H 4"

4FT | W 4" x L 48" x H 4"

8FT | W 4" x L 96" x H 4"

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Lens: Snap In Frosted Acrylic



Dimming Driver: 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire

CRI: 83

Life: 50,000 Hours

Listings: cETLus Listed, Title 24 Listed

Warranty: 1 Year Carefree for Parts & Components
(Labor Not Included)

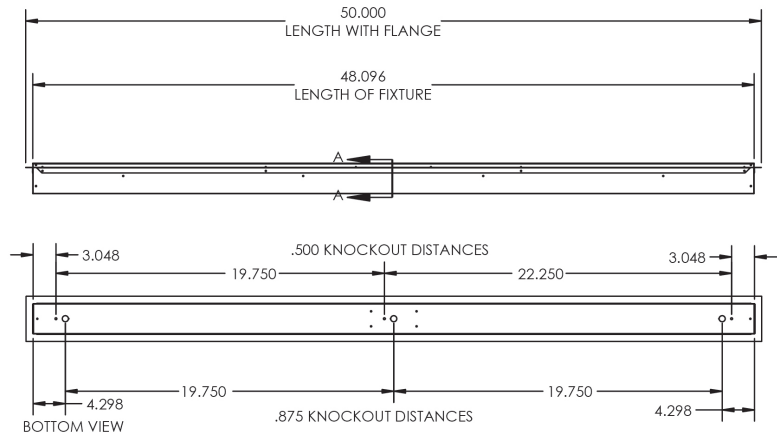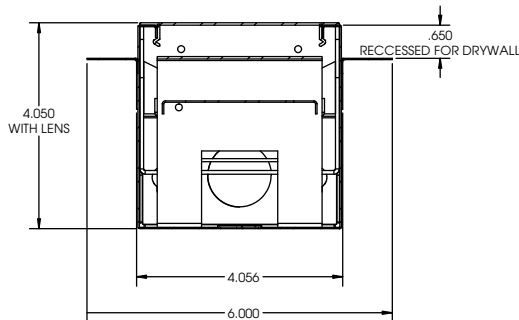

ORDERING INFORMATION Example: (12200-4-R-2-35K-D10-WH)

Model	Length Wattage Lumens	Color Temp	Dimming Driver	Flange Finish	Options
12200-4-R²	2¹ 2Foot 30 Watts 3400 Lumens	Commercial	(Blank) <i>Standard</i>	WH White	EM Emergency Backup Battery
Trimless T-Bar	4 4Foot 36 Watts 4200 Lumens	35K 3500K	Non-Dimming	BK Black	DS Integrated Daylight Sensor
Grid Ceiling	8 8Foot 72 Watts 8400 Lumens	40K 4000K		SL Silver	
12200-4-RR²	Trimless Drywall	Industrial	D10		
Hard Ceiling		50K 5000K	120-277V 5-Wire		
			0-10V		
			(100% -10%)		
12200-4-RF	Flanged Drywall		INC		
Hard Ceiling			120V 2-Wire		
			Incandescent		
			(100%-1%)		

¹ Not available on the 2' fixture

² Trimless mounting options do not require finish