ALCON LIGHTING

Project Name: Type: Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade Alcon Lighting RFT Series Architectural LED Linear Wall Mount Direct Light Fixture delivers continuous clean lines and clear wall light to commercial, hospitality and residential interior wall lighting applications. Our slim profiles and stylish modern wall sconces offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

2FT | W 6" x **L** 24" x **H** 6"
4FT | W 6" x **L** 48" x **H** 6"
8FT | W 6" x **L** 96" x **H** 6"

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel
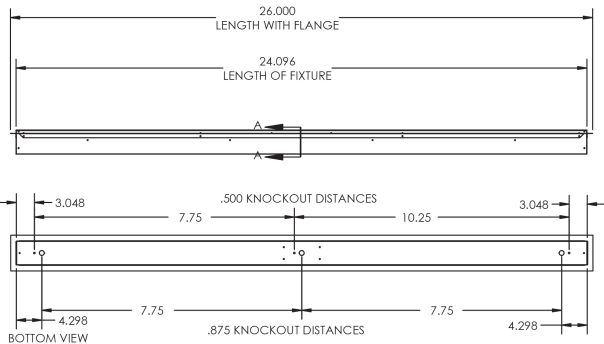**Lens:** Snap-in frosted acrylic
Dimming Driver: 0-10V (100-10%) 120-277V 5-wire or incandescent 120V 2-wire
CRI: 83
Life: 50,000 hours
Listings: cETLus Listed, Title 24 Listed
Warranty: 1 Year Carefree for Parts & Components (Labor Not Included)

26.000
LENGTH WITH FLANGE

24.096
LENGTH OF FIXTURE

3.048   .500 KNOCKOUT DISTANCES   3.048
7.75   10.25

4.298   7.75   7.75   4.298
BOTTOM VIEW   .875 KNOCKOUT DISTANCES

SPEC GRADE · C ETL US LISTED · TITLE 24 · DIMMABLE · ASSEMBLED IN THE USA

ORDERING INFORMATION   Example: (12200-6-W-4-35K-D10-WH-EM)

Model	Length | Wattage | Lumens	Color Temp	Dimming Driver	Finish	Options
-	-	-	-	-	-
12200-6-W RFT Wall	**2** 2 Foot | 30 Watts | 3400 Lumens **4** 4 Foot | 36 Watts | 4200 Lumens **8** 8 Foot | 72 Watts | 8400 Lumens	**35K** 3500K **40K** 4000K **50K** 5000K	**(Blank)** Non-Dimming **D10** 120-277V 5-Wire 0-10V (100% -10%) **INC** 120V 2-Wire Incandescent (100%-1%)	**WH** White **BK** Black **SL** Silver	**EM** Emergency Backup Battery **DS** Integrated Daylight Sensor