

#### SPECIFICATION SHEET

**Shop Now** 

Project Name: Type: Quantity:

#### **INTENDED USE**

The Round-Panel Pendant/Recessed/ Surface LED Light is a versatile fixture designed for modern commercial interiors. With three mounting options, multi-watt and multi-CCT adjustability, and smooth dimming, it adapts easily to various architectural settings. Ideal for hotels, lobbies, classrooms, and retail spaces, it delivers clean, efficient illumination with a refined aesthetic suitable for damp locations.

#### **FEATURES**

Construction: Aluminum

Lens: Milky prismatic Diffused Lens with a

perforated cover Voltage: 120-277V Dimming Driver: 0-10V

Downlight Efficacy: 95-115 lm/W

Color Temperature: 30/35/40K Selectable

switch CRI: 80+
Power Factor: > 0.98


**Operating Temperature**: -46°F - 104°F

Life: 50,000 Hours

**Listings:** UL/cUL us listed, Damp location. **Warranty:** 5 Years carefree for parts & components (Labor not included)







12201-R



Optional Uplight 24" & 39"



12201-S













# ORDERING INFORMATION Example:

| Model | Mounting                             | Size   Downlight Wattage   Lumens  | Uplight Wattage   Lumens <sup>1</sup>                             | Finish                          | Options   |
|-------|--------------------------------------|--|---|---------------------------------|---|
| 12201 | S Surface<br>P Pendant<br>R Recessed | <b>16</b> 16"   25/30/35W   3325-4025 lm<br><b>24</b> 24"   30/40/50W   4750-5750 lm<br><b>39</b> 39"   40/60/80W   7600-9200 lm | <b>Blank</b> Not required 24! 24"   3W   390 lm 39"   5W   650 lm | <b>WH</b> White <b>BK</b> Black | EM Emergency Battery MS Motion Sensor LV Louver |


1 Uplight avialable only in 24" and 32"



## PERFORMANCE DATA

| Size | Downlight Wattage   Lumens | Uplight Wattage   Lumens (Optional) |  |
|------|----------------------------|-------------------------------------|--|
| 16"  | 25/30/35W   3325-4025 lm   | N/A                                 |  |
| 24"  | 30/40/50W   4750-5750 lm   | 3W   390 lm                         |  |
| 39"  | 40/60/80W   7600-9200 lm   | 5W   650 lm                         |  |


## **LINE DRAWINGS**

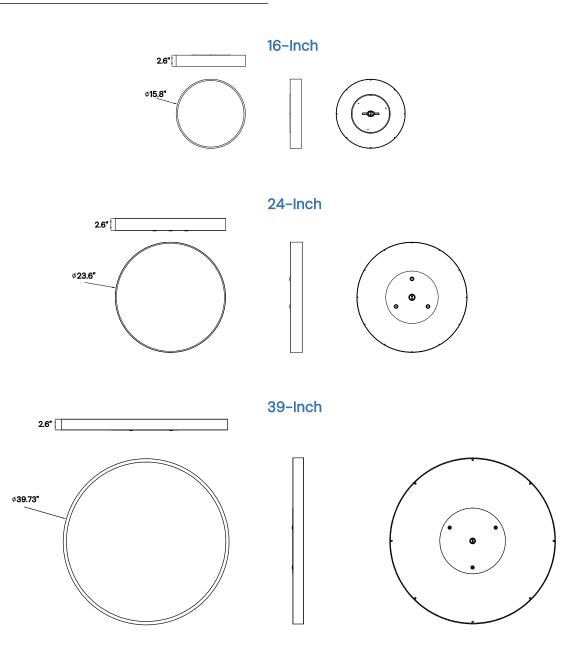





# PENDANT MOUNT DETAILS


### 16-Inch





## 39-Inch







# **COLOR TEMPERATURE** GUIDE 2700K 3000K 3500K 4000K 5000K **WARM SOFT WHITE NEUTRAL** DAYLIGHT GLOW inviting non-threatening





