

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

Featuring an elegant and original design, this large, architectural-grade LED half circle pendant affords powerful downlighting and uplighting. Designed with hospitality, residential and commercial interiors in mind, our light comes in extruded aluminum outer housing with a glare-free reflector. The distinctive light includes adjustable aircraft cables for hanging.

### FEATURES

**Construction:** Extruded aluminum outer housing. Adjustable power cord and AC cables with push button grippers are standard

**Lens:** White frosted acrylic diffuser

**Reflector:** Glare-free, one piece, heavy gauge aluminum

**Dimensions:** Width 1.10" x Depth 2.20"

**Mounting:** All standard J-boxes

**Remote Canopy:** 3.80" D x 0.45" H

**Pendant:** 8' adjustable aircraft cables/power cord included (Custom length available, consult MFG)

**Voltage:** 120/277VAC

**Dimming:** 0-10V (100-1%) for static white options

**CRI:** 90+

**Emergency Battery:** External 90 min. back-up w/ test switch

**Warranty:** 5 years (Static Colors) and 3 years (RGBW & Tunable White) Carefree for parts & components (Labor not included)

**Listings:** ETL listed per UL and CSA standards, Made in USA, Buy American Act (BAA) compliant




### Circle Shape Options


90-17 - 90° 17 In. Half Circle




90-40 - 90° 40 In. Half Circle




120-17 - 120° 17.55 In. Half Circle



120-22 - 120° 22 In. Half Circle




120-40 - 120° 40 In. Half Circle




180-17 - 180° 17 In. Half Circle



180-22 - 180° 22.5 In. Half Circle



180-37 - 180° 37 In. Half Circle

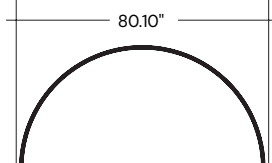

### Linear Length Options

L2-2 ft. (23.65")



L3-3 ft. (35.00")



L4-4 ft. (46.40")



L5-5 ft. (57.75")



L6-6 ft. (69.15")



L8-8 ft. (91.90")



## ORDERING INFORMATION Example:

Model	Circle Shapes   Radius   Wattage   Lumens	Linear Length   Wattage   Lumens	Optics	Finish <sup>2</sup>	Color Temp	Driver	Options
<b>12258</b>	<b>90-17</b> 90°   17 In.   24 Watts   2045 lm <b>90-22</b> 90°   22.55 In.   28 Watts   2100 lm <b>90-37</b> 90°   37 In.   49 Watts   4100 lm <b>120-17</b> 120°   17.55 In.   30 Watts   2700 lm <b>120-22</b> 120°   22 In.   43 Watts   3630 lm <b>120-40</b> 120°   40 In.   80 Watts   5460 lm <b>180-17</b> 180°   17 In.   44 Watts   4100 lm <b>180-22</b> 180°   22.55 In.   56 Watts   4200 lm <b>180-37</b> 180°   37 In.   98 Watts   8200 lm	<b>(Blank)</b> Circle Shape Only <b>L2</b> 2 Foot   20 Watts   1732 Lumens <b>L3</b> 3 Foot   30 Watts   2585 Lumens <b>L4</b> 4 Foot   40 Watts   3465 Lumens <b>L5</b> 5 Foot   50 Watts   4317 Lumens <b>L6</b> 6 Foot   60 Watts   5170 Lumens <b>L8</b> 8 Foot   80 Watts   6930 Lumens <b>L<sub>xxx</sub></b> <small>xxx = Custom Length</small>	<b>Blank</b> <sup>1</sup> Direct Downlight <b>DI</b> Direct / Indirect	<b>WH</b> White <b>BK</b> Black <b>SL</b> Silver	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>010</b> 0-10V	<b>XEM10</b> <sup>4</sup> 10W External Emergency Battery <b>AB</b> <sup>5</sup> AB Switching <b>XX</b> Custom AC Cable/ Power Cord (25' Max)
					<b>RGBW</b> RGB + W (3500K)	<b>DMX</b> <sup>3</sup> DMX	<b>DMX-W-WIFI</b> <sup>6</sup> DMX Wall Control (White) + WiFi <b>DMX-B-WIFI</b> <sup>6</sup> DMX Wall Control (Black) + WiFi

<sup>1</sup> This option reduces mA, watts, and delivered lumens by half.

<sup>2</sup> Canopy and cord finish will match the fixture's finish.


<sup>3</sup> RGBW products must be paired with a DMX control.

<sup>4</sup> Designed for remote installation, with a red indicator light and test switch housed in a convenient ceiling-mounted box. Extends remote driver length to 36 inches.


<sup>5</sup> Direct and indirect LEDs may be wired separately. The quantity of drivers, quantity of feed points, and size of driver box (36")\* may increase.

<sup>6</sup> See further information on page 3.


## LINE DRAWINGS & DIMENSIONS

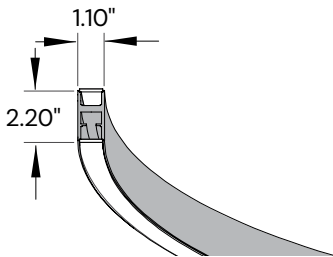

Cross Section

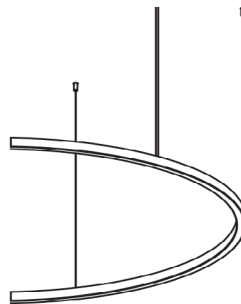


Remote Driver Mounting



Remote Driver Canopy  
3.80" D x 0.45" H




End Caps  
Included

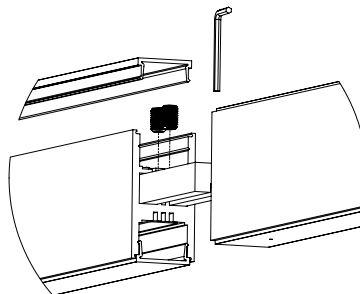

Joiner


## EXAMPLE OF THE DESIGNS MADE POSSIBLE WITH THE CONTOUR

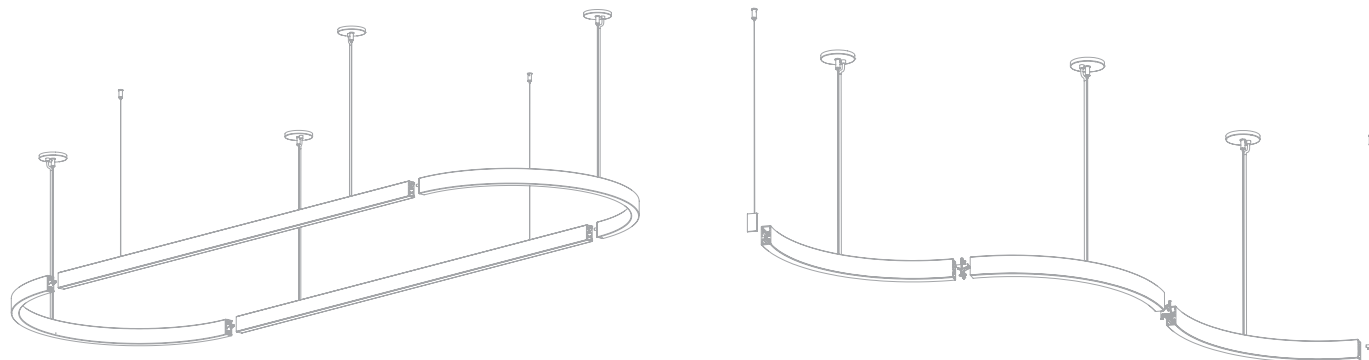


## COMPATIBLE DIMMERS FOR STATIC WHITE

	ALCON LIGHTING	LUTRON	LEVITON®
0-10 V	<a href="#">2100</a> <a href="#">2101</a> <a href="#">2102</a>	Diva DVTV	IP-710-DL

## RGB DMX CONTROLS

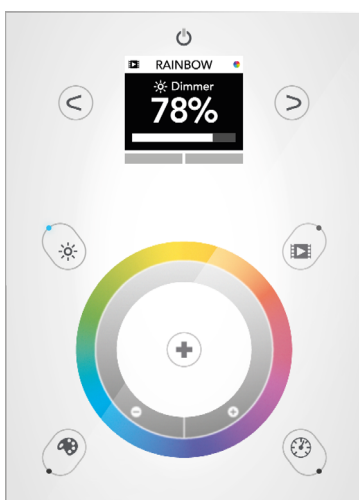

**DMX-W-WIFI**  
DMX Wall Control (White) + WiFi

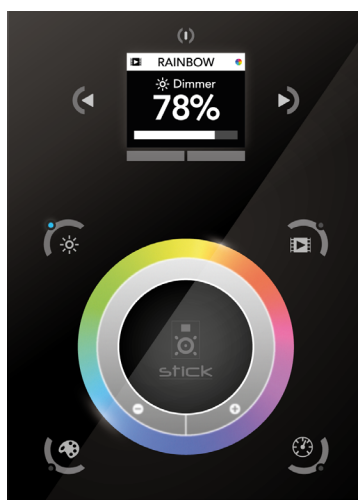

**DMX-B-WIFI**  
DMX Wall Control (Black) + WiFi

## COLOR TEMPERATURE GUIDE

