



Project Name: _____ Type: _____ Quantity: _____

INTENDED USE


With an adjustable aircraft cable available in custom lengths and finishes, the three-tiered, modern commercial-grade chandelier offers an indelible focal point to any interior project or application. These hanging lights provide both uplighting and downlighting for superior performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels and restaurants. Our product can be custom-made in several finishes.

FEATURES


- Pendant:** 8' Adjustable Aircraft Cable/Power Cord Included (Custom length available, Consult MFG)
- Construction:** Extruded aluminum outer housing Adjustable power cord and AC cables with push button grippers standard
- Lens:** White frosted acrylic diffuser
- Reflector:** Glare-free, one piece, heavy gauge aluminum
- Dimming:** Standard 0-10V Dimming Driver
- Mounting:** All standard J-boxes
- Voltage:** 120/277V, 50/60 Hz.
- Driver:** 0-10V (100-1%)
- CRI:** 90
- Emergency:** 90 minutes minimum, Remote install only

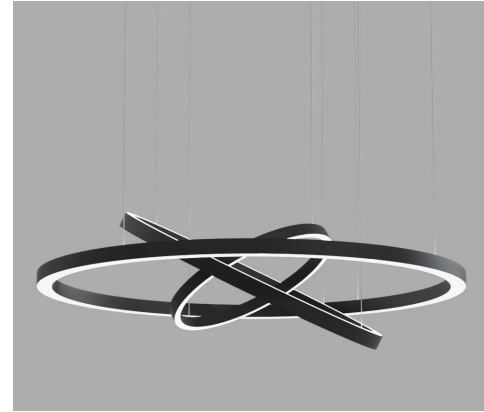

M — Medial



MR — Medial Remote



SR — Standard Remote




Medial Canopy
10 x 2.25 in.



Medial Remote/
Standard Remote
Driver Canopy
3.8 x 0.45 in.



Remote Driver
24" x 2" x 2"

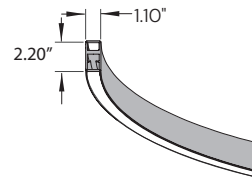

Cross Section



Ordering code example: [12281- 2/3/4-30K-SL-WH-SR-EM](#)

Model	Size Wattage Lumens ¹ <small>Pick Three Sizes Example: 2/3/4</small>	Color Temp	Finish	Cable Finish	Mounting	Options
12281	2 2 ft 52 W 4337 lms	30K 3000K	WH White	WH White	M Medial	EM 10W Emergency Battery Pack
	3 3 ft 78 W 6507 lms	35K 3500K	SL Silver	GR Gray	MR Medial Remote	XX Custom AC Cable/ Power Cord (25' Max)
	4 4 ft 104 W 8676 lms	40K 4000K	BK Black		SR Standard Remote	DMX DMX Controller
	5 5 ft 130 W 10844 lms					
	6 6 ft 156 W 13014 lms	RGBW RGB + 3500K				
	8 8 ft 209 W 17352 lms					

¹Size | Wattage | Lumens are distributed 50% up and 50% down

COLOR TEMPERATURE GUIDE

