




READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.


PRE-INSTALLATION

1. Follow the assembly instructions by reading the numerical progression.
2. Use a qualified electrician for installation of this lighting fixture.
3. Before installing fixture, disconnect power by turning off the circuit breaker or by removing the fuse at the fuse box.
4. All electrical connections must be in accordance with local and national electrical code or Canadian electrical code standards.
5. Use CSA or UL listed wire connectors suitable for the gauge, type and number of conductors.
6. Attach junction box grounding wire (green or bare copper) and the bare copper wire from the fixture together. If junction box has no ground wire, attach the bare copper fixture wire to the green ground screw on the crossbar.
7. Estimated assembly time: 20 minutes
8. Tools required for assembly (not included): Flathead screwdriver, Phillips screwdriver, Pliers, Electric tape and Wire cutters.
9. Helpful tools (not included): Wire strippers, Ladder.


Surface Mount



1-Light




2-Lights




3-Lights


Light Engine




Panel




Spot




Suspension



Fixed
Downlight




Gimbal



Snoot
Gimbal



READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

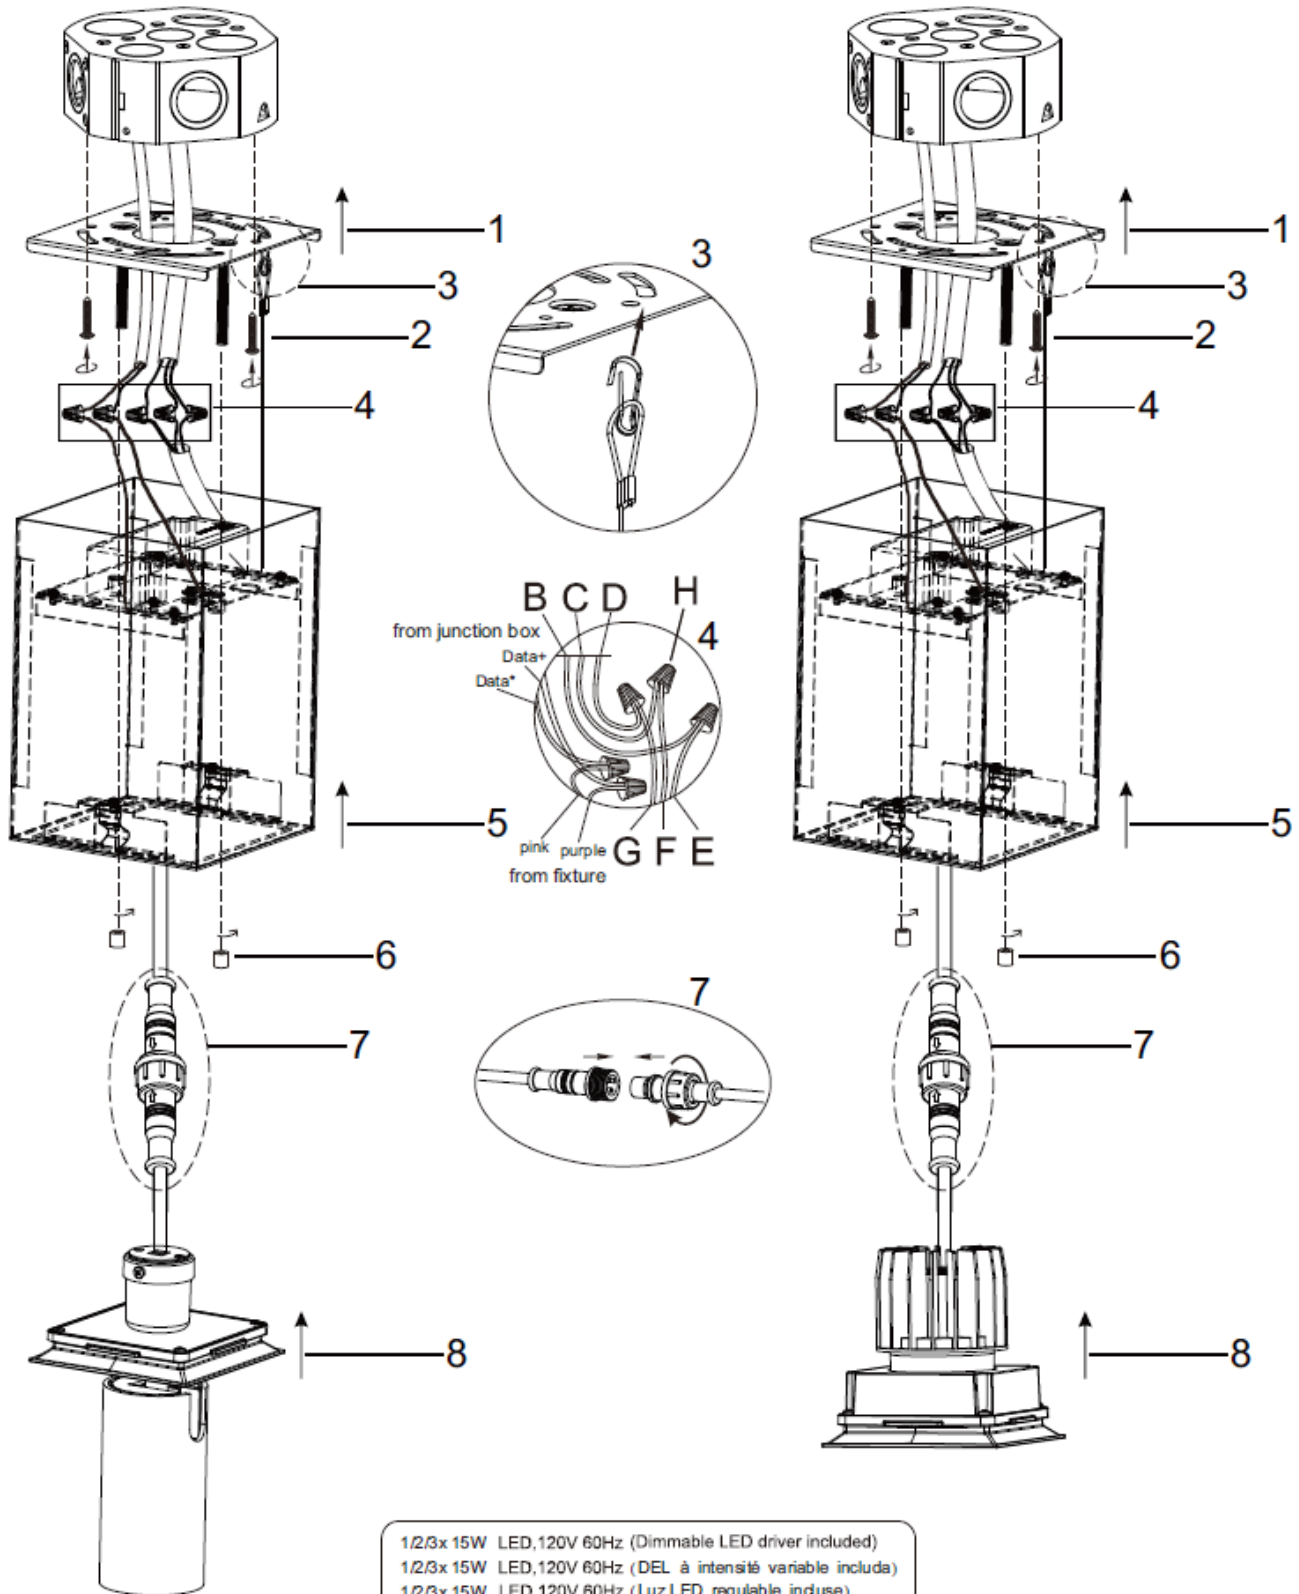



READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

Disassembly diagram

