

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Though built for commercial-grade applications, with its many trim styles, this durable fixture is also used in residential installations. Our 12305 Family includes pendant, wall or ceiling surface cylindrical LED downlights, making it an extremely versatile product. Made from a single cylinder in diecast aluminum with no visible hardware in a sleek, symmetrical design, this light is available in multiple sizes and lumen outputs ranging from 1260L to 2030L.

PRODUCT FAMILY

- 12305-P | Pendant
- 12305-S | Surface
- 12305-W | Wall

FEATURES


- Construction:** Extruded aluminum body, powder coat with premium paint
- Optics:** 15° / 24° / 38° fixed beam spread options.
- Pendant Mounting:** 72" Aircraft Cable standard. Mounts over existing octagon box.
- Dimming:** Constant current TRIAC & ELV @ 120V, 0-10V @ 120-277V
- CRI:** 90+
- Life:** 50,000 hours
- Warranty:** 5 years carefree for parts & components (labor not included)
- Listings:** cETLus, Title 24-JA8, Damp Location Suitable



White Exterior Finishes



Black Exterior Finishes

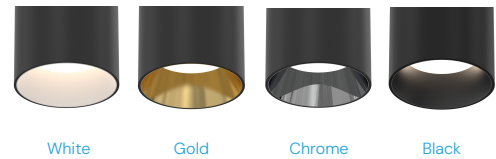


Lens Options




ORDERING INFORMATION Example: (12305-P-S-6-13W-27K-15-WH-GD-CL)

Model	Mount Type	Diameter	Height	Wattage Lumens	T ₅₀ hr	Optics	Driver	Exterior Finish	Interior Finish	Lens Options	Options
12305	P Pendant	2 2"	8 8" Tall	13 13W 1260 lms	27K 2700K	15 15°	TRI/ELV TRIAC / ELV	WH White	WH White	CL Clear	XEMI External Emergency Back-up Inverter
			13 13" Tall	30K 3000K	2 2	O10 0-10V Dimming	BK Black	BK Black	LI Linear Spread		
	S Surface	13 13" Tall	18 18" Tall	35K 3500K	44° Medium Flood	O10 0-10V Dimming	CR Chrome	CR Chrome	FR Frosted		
			18 18" Tall	40K 4000K	38 38°		GD Gold	GD Gold	SO Solite		
	W Wall	4 4"	6 6" Tall	13 13W 1260 lms	10 10" Tall	26 26W 2030 lms	38° Wide Flood			HC Honeycomb	
			10 10" Tall	18 18" Tall							


Pendant 2" Diameter Dimensions

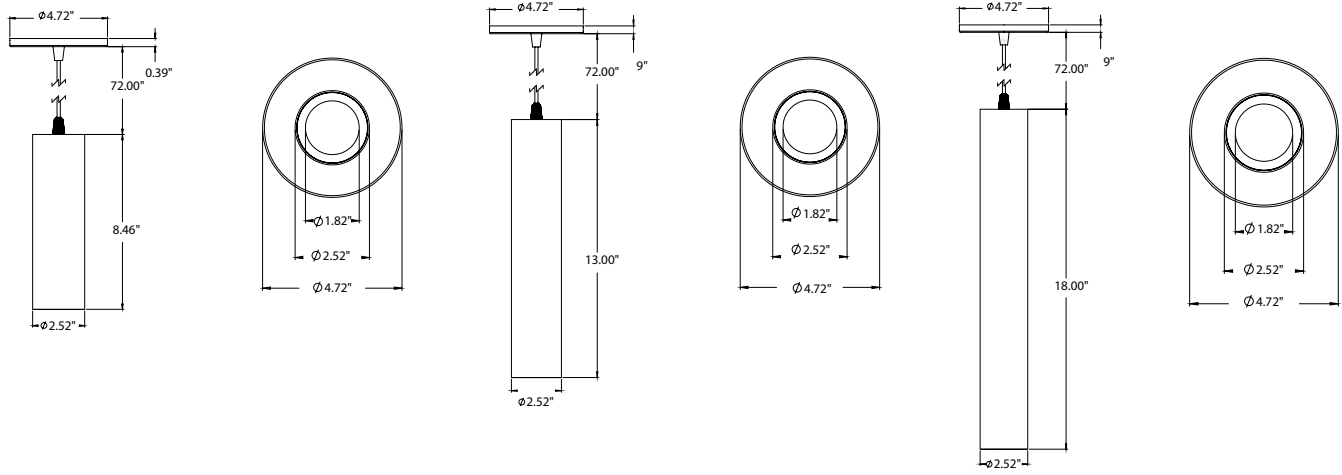


Pendant 4" Diameter Dimensions

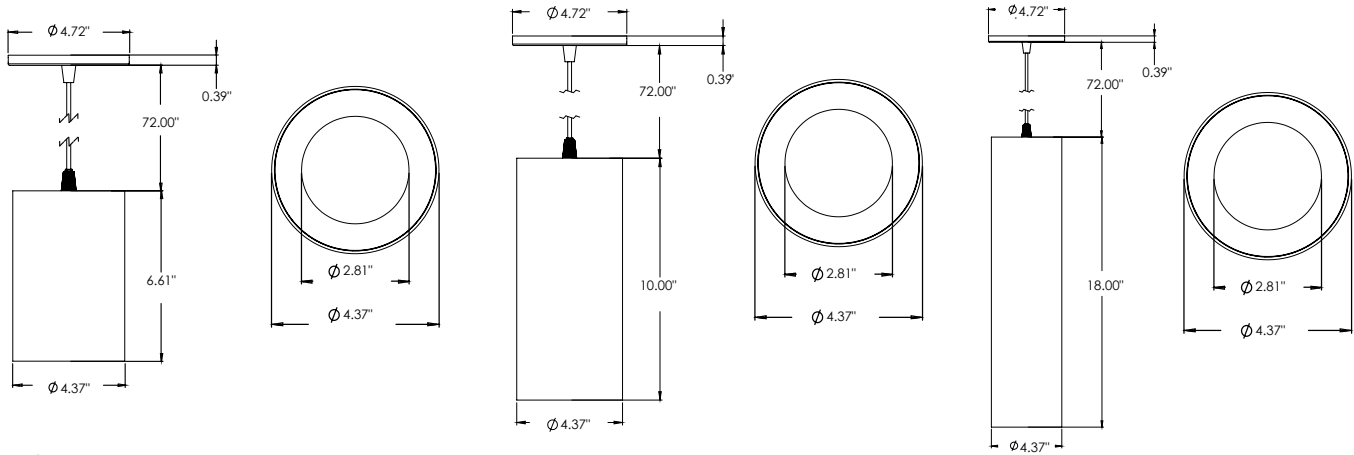


Surface 2" Diameter Dimensions

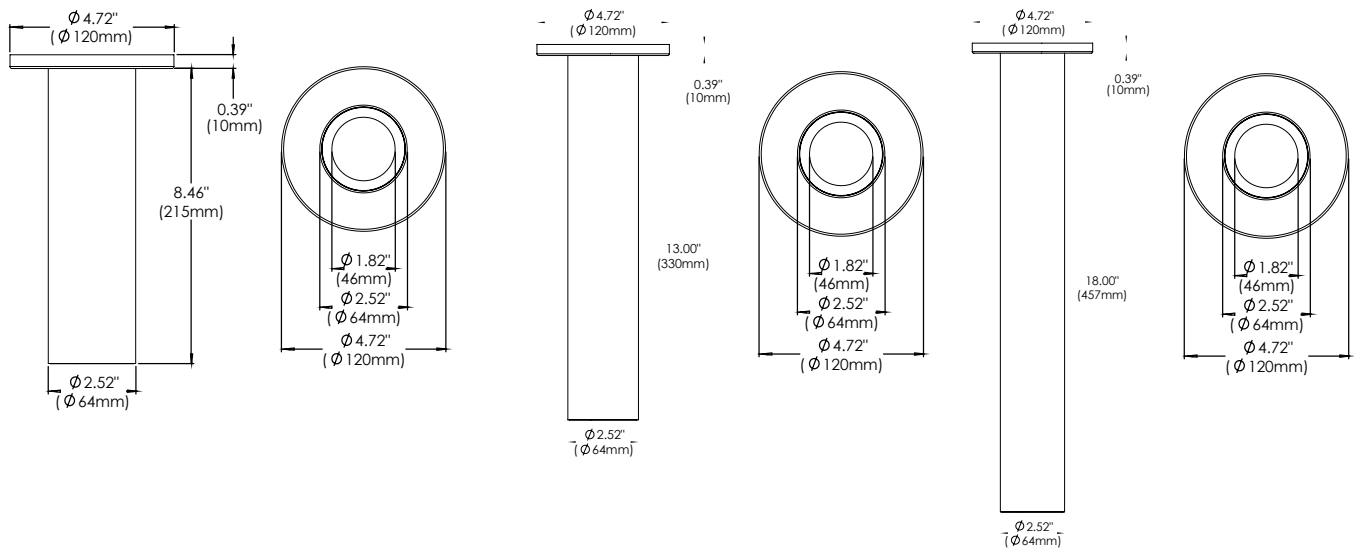


Surface 4" Diameter Dimensions

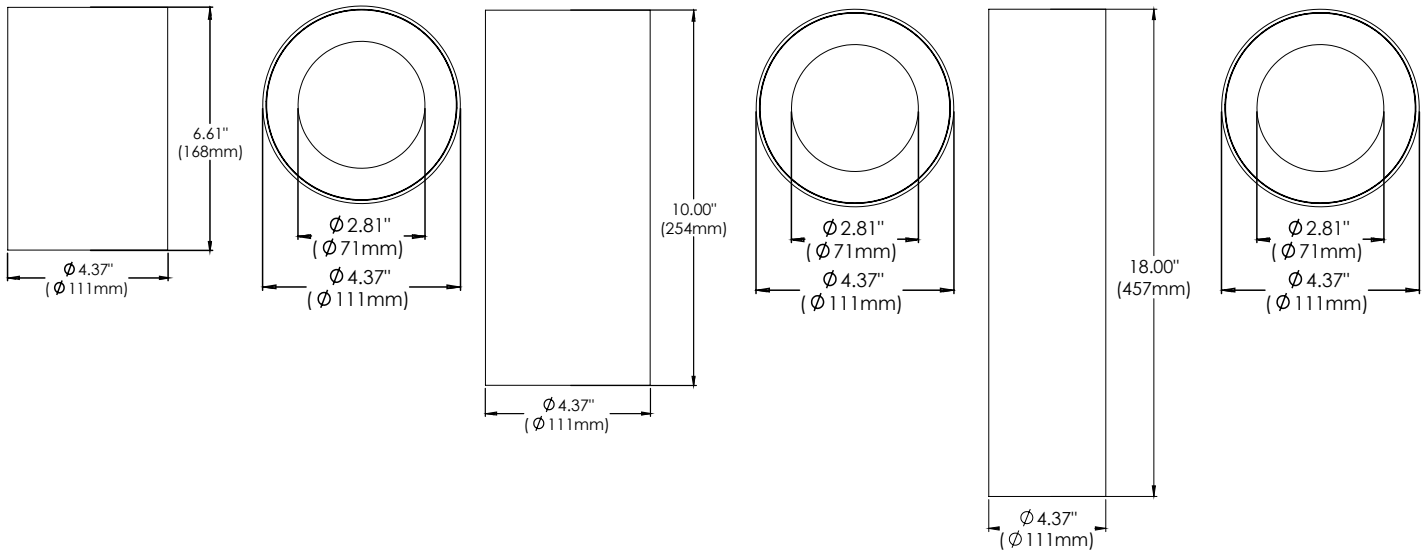

Wall 2" Diameter Dimensions

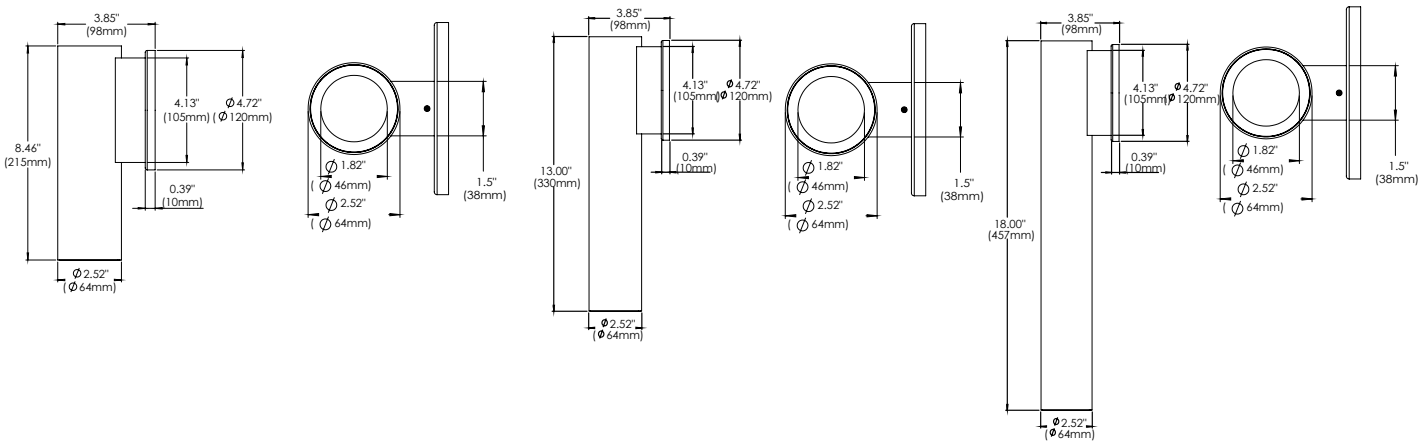


Wall 4" Diameter Dimensions

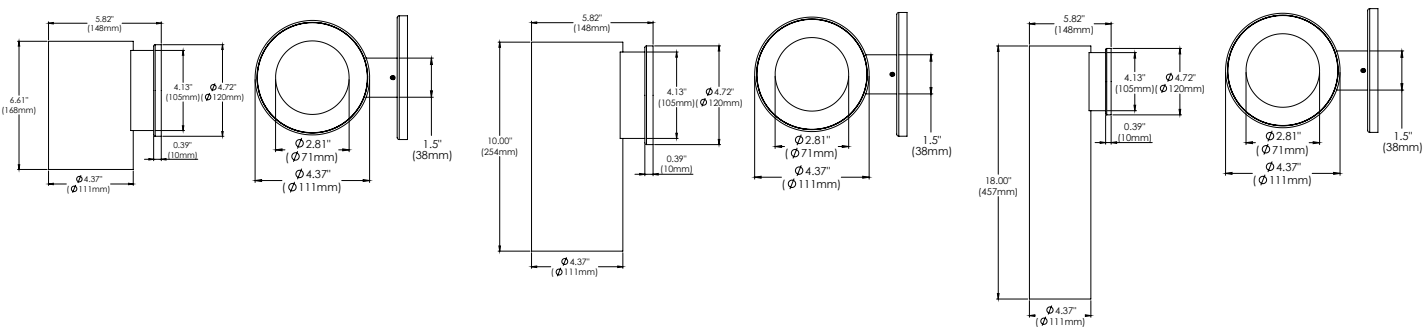


2" DIAMETER PHOTOMETRICS


13W | 15° Narrow Flood | Clear Optics

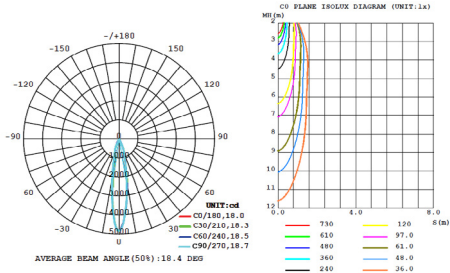

13W | 24° Medium Flood | Clear Optics

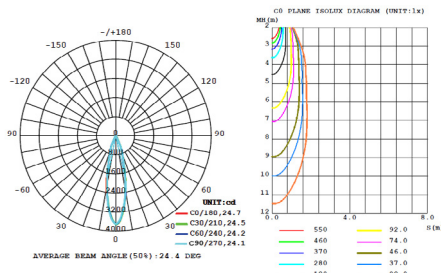


13W | 38° Wide Flood | Clear Optics

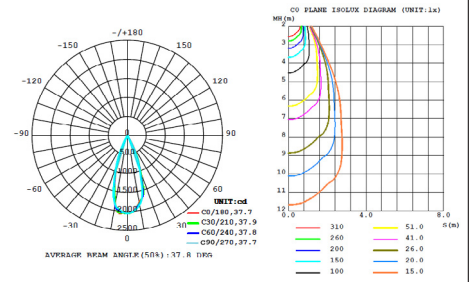


4" DIAMETER PHOTOMETRICS


13W | 15° Narrow Flood | Clear Optics

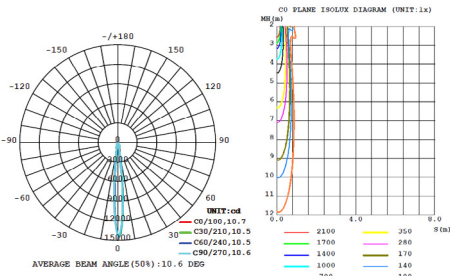


13W | 24° Medium Flood | Clear Optics

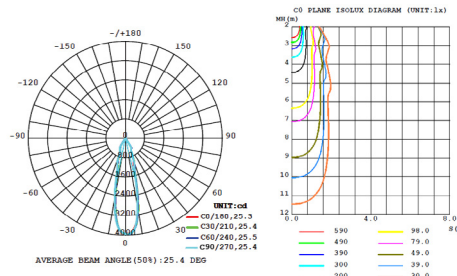


13W | 38° Wide Flood | Clear Optics

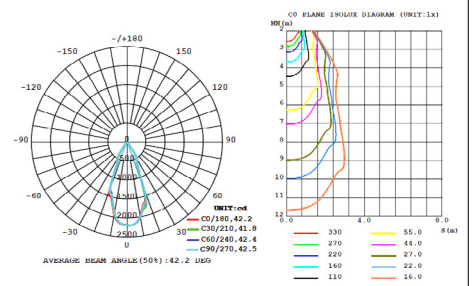


26W | 15° Narrow Flood | Clear Optics

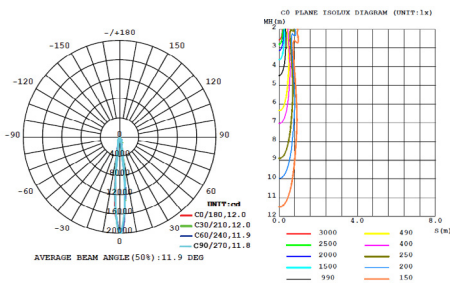

26W | 24° Medium Flood | Clear Optics

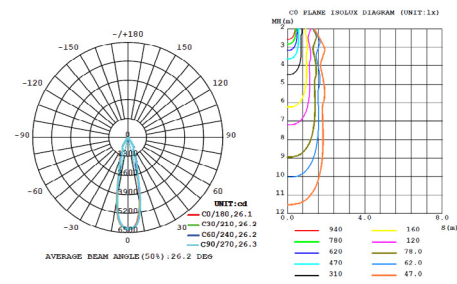

26W | 38° Wide Flood | Clear Optics

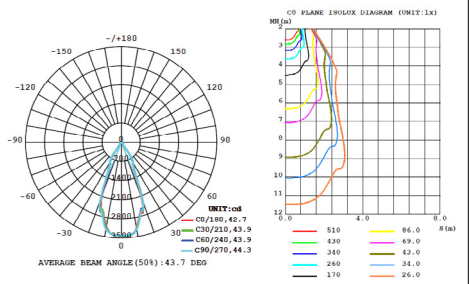

COLOR TEMPERATURE GUIDE

