

Project Name:

Type:

Quantity:

## FIXTURE SPECIFICATIONS

### INTENDED USE

Our cylinder suspended pendant light offers elegant direct LED high Color Rendering Index (CRI) down light with dimming capability. The architectural two-inch cylindrical fixture is manufactured for medium to high ceilings. The product comes with H-track type mounting or a suspension canopy-mount with an adjustable field cord. Available in a variety of warm and cool white color temperatures, beam spreads and heights.

### FEATURES

**Construction:** Steel housing

**Mounting:** Fixture comes standard with 3-wire H-type track connection and canopy pendant mount with field adjustable cord to 72" (canopy mounts to standard J-Box)

**Dimming:** ELV dimming

**Voltage:** 120V


**CRI:** 90

**Operating Temperature:** -40°F to 122°F  
(-40°C to 50°C)



**Life:** 35,000 Hours L70

**Warranty:** 3 years carefree for parts & components  
(labor not included)

**Listings:** cETLus, cULus listed, Assembled in the USA



Hardware is included for track and canopy mount

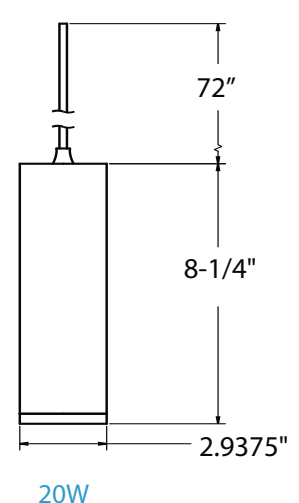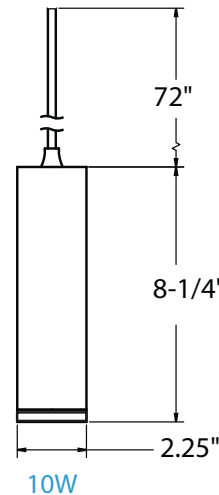

## ORDERING INFORMATION Example: (12315-8L-WH-B15)

Model	Lumens   Wattage	Finish	Beam Spread	Color Temp	Options
<b>12315</b>	<b>8L</b> 800 Lumens   10 Watts	<b>WH</b> White	<b>B15</b> 15° Spot	<b>(Blank)</b> 30K-35K-40K CCT Switch	<b>HL</b> Black Hex Cell Louver
	<b>14L</b> 1400 Lumens   20 Watts	<b>BK</b> Black	<b>B25</b> 25° Narrow Flood	<b>27K</b> 2700K	<b>TA</b> Factory Installed Track Adapter
			<b>B45</b> <i>Standard</i> 45° Flood	<b>30K</b> 3000K	
				<b>35K</b> 3500K	
				<b>40K</b> 4000K	

## COLOR TEMPERATURE GUIDE

