



Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Our antimicrobial, recessed shallow basket LED troffer light incorporates a durable, commercial-grade design with antimicrobial white paint to resist bacteria, rust and corrosion. Providing indirect light for even distribution, this center basket troffer is perfect for commercial applications, such as offices, medical facilities, gyms and warehouses, the fully enclosed high-output LED light provides nearly 6,000 lumens in either of its 2-foot x 2-foot or 2-foot x 4-ft dimensions. This recessed ceiling LED troffer is also available for surface-mount applications. Available with Lutron Vive, Wattstopper, Enlighted, IR-TEC, EasySense and color-changing RGB+W. Assembled in the USA, our troffer ceiling light is available with Philips Xitanium 0-10V or Hi-Lume 1% EcoSystem dimming. Design for recessed-mounting in exposed t-bar ceilings.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel
Color Temperature: Field adjustable 3500K/4000K/5000K selectable switch
CRI: 80
Mounting: Mounts to T-Bar ceiling
Lens: Glare-free snap-in frosted acrylic for even distribution
Voltage: 120-277V
Finish: White antimicrobial finish
Life: 54,000 hours
Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)
Listings: cULus, DLC Premium, Suitable for damp locations, Assembled in the USA

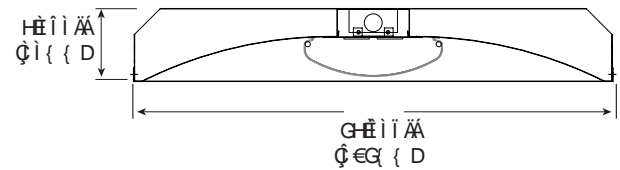

AV - Optional Air Vents



ORDERING INFORMATION Example: 12505-G-2234-010-EM5

Model	Trim	Size Wattage Lumen	Dimming	Warranty	Options
12505	G Grid	2234 2x2 30W, 35W, 40W 3750lm, 4375lm, 5000lm	010 0-10V 10%-100%	Blank <small>Standard</small> 5 Year Warranty	EM5 5W EM Battery Backup
	F Flange	2445 2x4 34W, 38W, 45W 4250lm, 4750lm, 5625lm	BLS Bi-Level Step Dimming 50%/100% BLSXX¹ Bi-Level Step Dimming Replace X with Percentage from 10%-90% TLS Tri-Level Step Dimming 30%/70%/100% TLSXX¹ Tri-Level Step Dimming Replace X and X with Percentages from 10%-90% 050 Tunable White 0-10V	W7 7 Year Warranty W10 10 Year Warranty	EM8 8W EM Battery Backup EM16 16W EM Battery Backup EM25 25W EM Battery Backup OCDH Occupancy Sensor w/ Daylight Harvesting ELCU-200 Fail-to-on Emergency lighting, UL924 AV Air Vents

¹ Not available with (AV) Air Vents option

	ALCON LIGHTING	LUTRON	LEVITON®
0-10 V	2100 2101 2102	Diva DVTV	IP-710-DL

COLOR TEMPERATURE GUIDE

