

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Our antimicrobial LED troffer light incorporates a durable, architectural design with antimicrobial white paint to resist bacteria, rust and corrosion. Perfect for healthcare interiors such as doctor's offices and other medical facilities, the fully enclosed high-output LED light provides up to 12,000 lumens in either of its 2-foot x 2-foot or 2-foot x 4-ft dimensions. This recessed ceiling LED troffer is also available for surface-mount applications. Available with Lutron Vive, Wattstopper, IR-TEC and EasySense technologies. Assembled in the USA, our linear ceiling light is equipped with Philips Xitanium 0-10V dimming.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Mounting: Standard mounting to 15/16" T-Bar Ceiling. Surface mount option available.

Lens: Glare-free snap-in frosted acrylic for even distribution



Voltage: 120-277V

Finish: White antimicrobial finish

Life: 54,000 hours

Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (labor not included)

Listings: cULus Listed, CEC Compliant EM, Assembled in the USA

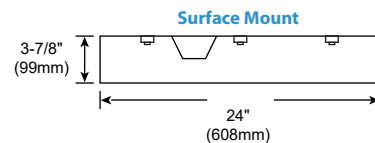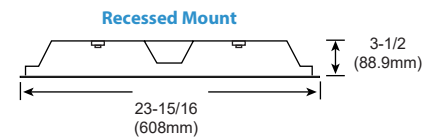

CR (Curved Ribbed Center)

CB (Curved Body)

FC (Flat Center)

CC (Concave Body)



ORDERING INFORMATION Example: (12508-R-CR-2227-27K-8-010)

Model	Mounting	Lens	Size Wattage Lumens	Color Temp	CRI	Dimming	Warranty	Options
12508	R T-Bar Recessed S Surface Mount	CR Curved Ribbed Center	2x2 2227 27 Watts 2915 Lumens	27K ¹ 2700K	8 80+	010 0-10V 10%-100%	Blank Standard 5 Year Warranty	EM5 5W EM Battery Backup
		CB Curved Body	2x3 2236 36 Watts 4137 Lumens	30K 3000K	9 90+	BLS Bi-Level Step Dimming 50%/100%	W7 7 Year Warranty	EM8 8W EM Battery Backup
		FC Flat Center	2x4 2244 44 Watts 4925 Lumens	35K 3500K		BLSXX Bi-Level Step Dimming Replace X with Percentage from 10%-90%	W10 10 Year Warranty	EM16 16W EM Battery Backup
		CC Concave Body	2x4 2254 44 Watts 4941 Lumens	40K 4000K		TLS Tri-Level Step Dimming 30%/70%/100%		EM25 25W EM Battery Backup
			2x4 2272 72 Watts 6065 Lumens	50K 5000K		TLSSXX Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		OCDH Occupancy Sensor w/ Daylight Harvesting
			2x4 2272 72 Watts 8275 Lumens					GTD Bodine Generator Transfer Device
			2x4 22108 108 Watts 12130 Lumens					

¹ Must be paired with 90+ CRI option
² Must be paired with 050 driver