

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Our linear LED wall or ceiling light incorporates a durable cube design and antimicrobial white paint to resist bacteria, rust and corrosion. Perfect for healthcare interiors such as doctor's offices and other medical facilities, the fully enclosed high-output LED light packs nearly 10,000 lumens in its 8-foot length. This wall or ceiling surface-mounted light comes in 2-foot, 3-foot, 4-foot and 8-foot standard lengths. Available with Lutron Vive, Wattstopper, IR-TEC and EasySense technologies. Assembled in the USA, our linear wall or ceiling light is equipped with Philips Xitanium 0-10V dimming.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Lens: Clear acrylic glass

Voltage: 120-277V


Finish: White antimicrobial finish

Operating Temperature: -4°F (-20°C) ~ 104°F (40°C)

Life: 54,000 hours

Warranty: 5 years carefree for parts & components (Labor not included)

Listings: UL, CEC Compliant EM, Assembled in the USA

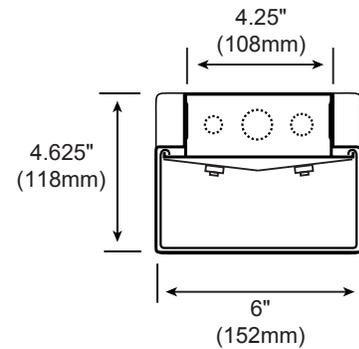

ORDERING INFORMATION Example: (12511-S-218-27K-8-010)

Model	Mounting	Size Wattage Lumens	Color Temp	CRI	Dimming	Warranty	Options	
12511	S Surface	218 2 FT 18 W 1858 lms	27K¹ 2700K	8 80+ CRI	010 0-10V 10%-100%	Blank <small>Standard</small> 5 Year Warranty	EM5 5W EM Battery Backup	
		227 2 FT 27 W 2736 lms	30K 3000K	9 90+ CRI	BLS Bi-Level Step Dimming 50%/100%		W7 7 Year Warranty	EM8 8W EM Battery Backup
		327 3 FT 27 W 2736 lms	350K 3500K		BLSXX Bi-Level Step Dimming Replace X with Percentage from 10%-90%		W10 10 Year Warranty	EM16 16W EM Battery Backup
	W Wall	333 3 FT 33 W 3344 lms	40K 4000K		TLS Tri-Level Step Dimming 30%/70%/100%		EM25 25W EM Battery Backup	
		340 3 FT 40 W 4053 lms			TLSXX Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		ELCU-200 Fail-to-on Emergency lighting, UL924	
		436 4 FT 36 W 3438 lms					GTD Bodine Generator Transfer Device	
		444 4 FT 44 W 4141 lms						
	P Pendant	454 4 FT 54 W 5082 lms						
		872 8 FT 72 W 6600 lms						
		888 8 FT 88 W 8006 lms						
		8108 8 FT 108 W 9825 lms						
		CS Custom Length (Replace <i>X</i> with Length in Feet)						

¹ Only compatible with 90+ CRI option