

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

This antimicrobial linear pendant or surface-mounted ceiling light provides up to 11,000 lumens of high-CRI LED light perfect for doctor's and dental offices, urgent care centers and other healthcare interiors. The fully enclosed light fixture resists bacteria, rust and corrosion, making this product ideal for medical applications. Our 120-277V light strip suits damp locations and comes in 4-foot and 8-foot standard lengths. This light is ideal for stairwells, lobbies, garages, corridors and hallways.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Color Temperature Switch: Capable of delivering 3500K, 4000K & 5000K color temperatures

Mounting: Surface mount standard, knock-outs for versatile configuration and simple mounting. 5-foot, 10-foot and 15-foot aircraft cable kits available for pendant mounting.

Lens: Clear acrylic glass

Voltage: 120-277V

Dimming: 0-10V (10%~100%)


Finish: White antimicrobial finish

Operating Temperature: -4°F (-20°C) ~ 104°F (40°C)

Life: 54,000 hours

Warranty: 5 years carefree for parts & components (Labor not included)

Listings: UL, DLC Premium, CEC Compliant EM, Suitable for damp location

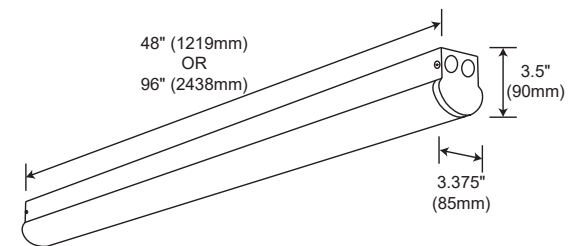

ORDERING INFORMATION Example: (12512-S-4LO)

Model	Mount	Size Wattage Lumens	Pendant Mounting	Options
12512	S Standard			
	Surface	4LO 4 FT 18W / 25W / 30W 2340lm / 3250lm / 3900lm	Blank None Required	EM8 8W EM Battery Backup
	T		AC5 5' Adjustable Aircraft Cable	EM15 16W EM Battery Backup
	T-Bar Clip Mount	4HI 4 FT 34W / 38W / 45W 4550lm / 5200lm / 5850lm	AC10 10' Adjustable Aircraft Cable	EM20 25W EM Battery Backup
	P		AC15 15' Adjustable Aircraft Cable	ELCU-200 Fail-to-on Emergency lighting, UL924
	Pendant	8LO 8 FT 38W / 46W / 54W 4940lm / 5980lm / 7020lm		GTD Bodine Generator Transfer Device
		8HI 8 FT 65W / 75W / 90W 8450lm / 9750lm / 11700lm		