

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Made for maximum efficiency, the general downlighting product can be installed in rows mounted either on the ceiling surface for general lighting in medical, hospital, commercial, retail and institutional applications. Our product, finished in an antimicrobial high-gloss, baked white enamel over rust-inhibiting phosphate coating for maximum corrosion resistance, suits damp locations. Die-formed, cold-rolled, heavy gauge steel housing construction offers durability and strength.

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel

Mounting: Surface mount compatible with most ceiling types. Stem mount options available.

Lens: Glare-free snap-in frosted acrylic for even distribution

Voltage: 120-277V



Finish: White antimicrobial finish

Life: 54,000 Hours

Ambient Operating Temperature: -4°F (-20°C) ~ 122°F (50°C)

Warranty: 5 years (static colors) and 2 years (tunable white) carefree for parts & components (Labor not included)

Listings: cULus, LM80, CEC Compliant EM

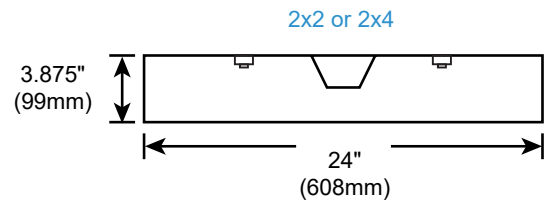

ORDERING INFORMATION Example: (12515-S-1436-27K-9-010)

Model	Mount	Size Wattage Lumen			Color Temp	CRI	Pendant Mount	Dimming	Warranty	Options
12515	S Surface P Pendant	1x4	2x2	2x4	27K ²	8	(Blank)	010	Blank ^{Standard}	EM5
		1436	2227	2436	2700K	80+	None Required	0-10V 10%-100%	5 Year Warranty	5W EM Battery Backup
		36 Watts 4361 Lumens	27 Watts 3598 Lumens	36 Watts 4850 Lumens	30K	9	SST	Bi-Level Step Dimming 50%/100%	7 Year Warranty	8W EM Battery Backup
		1444	2236	2444	3000K	90+	Swivel Stem Mount	BLXXX	10 Year Warranty	16W EM Battery Backup
		44 Watts 5584 Lumens	36 Watts 4536 Lumens	44 Watts 5798 Lumens	35K		DSM	Bi-Level Step Dimming Replace X with Percentage from 10%-90%		25W EM Battery Backup
		1454	2244	2454	3500K		Double Stem Mount	Replace X with Percentage from 10%-90%		Occupancy Sensor w/ Daylight Harvesting
		54 Watts 6404 Lumens	44 Watts 5384 Lumens	54 Watts 7134 Lumens	40K			Tri-Level Step Dimming 30%/70%/100%		ELCU-200
		1472	2254	2472	4000K			Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		Fail-to-on Emergency lighting, UL924
		72 Watts 9339 Lumens	54 Watts 6608 Lumens	72 Watts 9238 Lumens	50K			050		GTD
		14108	2272	24108	5000K			Tunable White 0-10V		Bodine Generator Transfer Device
		108 Watts 13713 Lumens	72 Watts 9072 Lumens	108 Watts 13088 Lumens	2065 ³					
			108 Watts 13216 Lumens		Tunable White 2000-6500K					
					2750 ³					
					Tunable White 2700-5000K					

¹ Can not be paired with 010 Dimming Driver

² Must be paired with 90+ CRI option

³ Must be paired with 050 driver