

FIXTURE SPECIFICATIONS

INTENDED USE

Made in America, this new antimicrobial LED surface or wall mount healthcare light provides illumination for lobbies, hallways and stairwells and hospital rooms. Our commercial-grade, round-shaped, two-inch lens aperture damp location-rated lighting fixture, powered by 120 to 277 voltage (50/60 Hz), features an acrylic frosted glass lens.

FEATURES

Lens: Frosted Acrylic Glass

Voltage: 120-277V, 50/60 Hz

Finish: White Antimicrobial Finish

Operating Temperature: -4°F (-20°C) ~ 122°F (50°C)


Life: 54,000 Hours

Warranty: Standard 5 Years Carefree for

Parts & Components

(Labor Not Included)

Listing: UL listed, ARRA compliant, Suitable for Damp Locations, Made in the USA

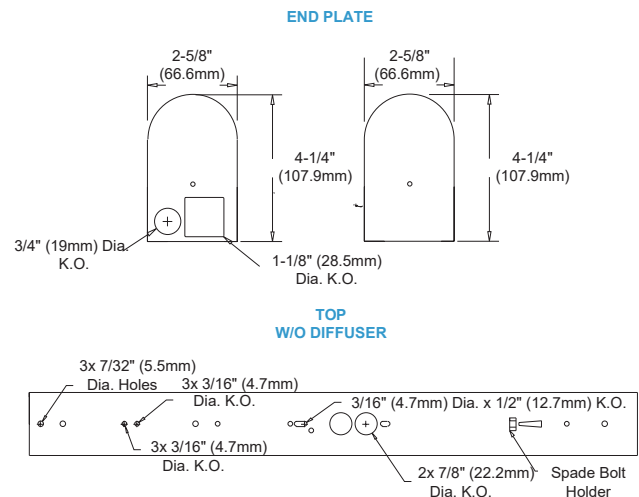

ORDERING INFORMATION Example: (12519-S-14L-30K-80-010)

Model	Mounting	Length Wattage Lumen	Color Temp	CRI	Dimming	Warranty	Options
12519	S Surface Mount	14L 2 Foot 18 Watts 1420 lms	27K¹ 2700K	80 80+ CRI	010 0-10V 10%-100%	Blank <small>Standard</small> 5 Year Warranty	EM5 5W EM Battery Backup
	W Wall Mount	20L 2 Foot 27 Watts 2023 lms	30K 3000K	90 90+ CRI	BLS Bi-Level Step Dimming 50%/100%	W7 7 Year Warranty	EM7 7W EM Battery Backup
		26L 4 Foot 36 Watts 2626 lms	35K 3500K		BLSXX Bi-Level Step Dimming Replace X with Percentage from 10%-90%	W10 10 Year Warranty	PO Power Outlet with Ground
		38L 4 Foot 54 Watts 3831 lms	40K 4000K		TLS Tri-Level Step Dimming 30%/70%/100%		
			50K 5000K		TLSXX Tri-Level Step Dimming Replace X and X with Percentages from 10%-90%		

¹ Only compatible with 90+ CRI option