

INTENDED USE

The 2.75-Inch Architectural LED Light delivers high-output performance with energy-efficient operation, making it an ideal choice for offices, classrooms, museums, retail, hospitality, and residential spaces. With intense lumen output, it excels at achieving maximum foot candles from longer distances, ensuring effective illumination of objects, spaces, and architectural features while maintaining long-term reliability.

FEATURES

Construction: Durable die-cast aluminum with an integral heat sink designed for efficient thermal dissipation, ensuring maximum heat rejection and extended LED life

Aiming: 180° vertical adjustment

CRI: 90+

Voltage: 120V or 277V

Driver: Standard Non-Dimming (120V), ELV or Non-Dimming (277V) available

Life: Rated for a minimum of 50,000 hours (L70), based on ANSI TM-21 calculations using LM-80 standardized test data

Listing: ETL/cETL listed, Title 24 JA8 2016 (6), Assembled in the USA

Warranty: 5 years carefree for parts & components (Labor not included)



Small



Medium



Large



ORDERING INFORMATION Example:

Model	Size Wattage Lumens		Mounting		Circuit	Color Temp CRI		Finish		Beam Spread		Driver					
13127	SM16	Small 16W 1100 lm	H	Track:	1C ^{Std.}	1 Circuit	27K	2700K 90 CRI	BK	Black	B15	15° Spot	Blank	Non-dimming (120V)			
	SM21	Small 21W 1500 lm		J		Halo	1 Neutral	30K		3000K 90 CRI	WH ³	White		B25	25° Narrow Flood	ELV	ELV (120V)
	MD32	Medium 32W 2900 lm		J		Juno	2 Circuit	35K		3500K 90 CRI		Black		B45	45° Flood	N277	Non-dimming (277V)
			L	Lightolier	2 Neutral	40K	4000K 90 CRI	Heat Sink	B60 ⁴	60° Wide Flood							
			LG48 ¹	Large 48W 4500 lm	MR	Round Canopy		65K ¹	6500K 80 CRI								
	LG60 ¹	Large 60W 6000 lm	MS	Square Canopy		WD185 ²		Warm Dimming 1850K – 2700K									

¹ Available only in Small | 21W | 1500 lm (SM21)


² Available only in Small | 21W | 1500 lm (SM21) and Medium | 32W | 2900 lm (MD32)

³ Bright White with Black Heat Sink


⁴ Available only in Large size

LINE DRAWINGS


Small 2-3/4" Diameter
13127-SM

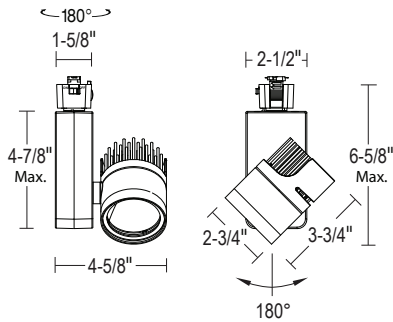

Medium 3-5/4" Diameter
13127-MD

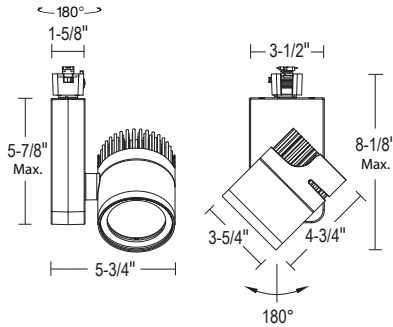

Large 4-3/4" Diameter
13127-LG

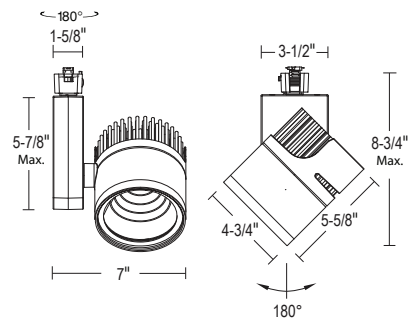

MONOPOINT OPTIONS

Track Light Fixture allows for single mounting of LT8 Series style track heads or single point 12V track heads.
Mounts to Standard Outlet Box



Round Monopoint
13127-XXXX-MR
Dia 4-7/8" x H 3/8"



Square Monopoint
13127-XXXX-MS

PRODUCT FAMILY ACCESSORIES

13000-TC	Track Channel
13000-L C	Linear Connector
13000-O A	Outlet Adapter
13000-SC	Slope Ceiling Track Adapter
13000-TB	T-Bar End Feed
13000-FC	Floating Canopy Connector
13000-EC	End Cap
13000-L C	Live End with Canopy Live
13000-LE	End
13000-L	L-Connector
13000-T	T-Connector
13000-X	X-Connector
13000-MC	Mini Connector
13000-CP	Cord and Plug Connector
13000-P A	Pendant Adapter
13000-CC	Conduit Connector Conduit
13000-CK	Continuation Kit

COLOR TEMPERATURE GUIDE

				
2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
✓	✓	✓	✓	✗