

INTENDED USE

The Architectural Wall Wash LED Track Light is designed to bring smooth, even illumination to retail, gallery, and hospitality interiors. Its frosted lens delivers uniform washes of light that highlight walls and surfaces with precision, while static white color temperature options provide balance across diverse environments. Offered in two sizes with 90+ CRI, the fixture ensures true color rendering and detail, making it ideal for commercial applications where visual impact matters. Available in black or white finishes and compatible with H, J, and L-type tracks, this durable aluminum track light offers flexibility for both single- and two-circuit systems

FEATURES

Construction: Extruded aluminum housing. Die-cast aluminum end caps

Lens: Built-in matte lens provides a diffuse, uniform wall wash beam spread. Protects LED and optical components from contaminants

Finish: powder coat paint

Aiming: ±175° vertical aim adjustment with ±90° aim indicator mark

CRI: 90+

Voltage: 120VAC 50/60Hz

Dimming Driver: 10%, Triac & ELV (120V)

Power Factor: ≥ 0.9

THD: ≤ 20%

Life: 50,000 hours in 77°F (25°C)

Listing: cETLus listed

Warranty: 5 years carefree for parts & components (Labor not included)



13128-15




13128-23




ORDERING INFORMATION Example:

Model	Size Wattage Lumens	Track Style	Circuit	Color Temp	Finish	Options
13128	15 15 Inch 31W 2449 lm	H Halo	1C ^{Std.} 1 Circuit	27K 2700K	BK Black	PLV Parabolic Louver
	23 23 Inch 62W 4898 lm	J Juno	1 Neutral	30K 3000K	WH White	
		L Lightolier	2C 2 Circuit	35K 3500K		
			2 Neutral	40K 4000K		

LINE DRAWINGS

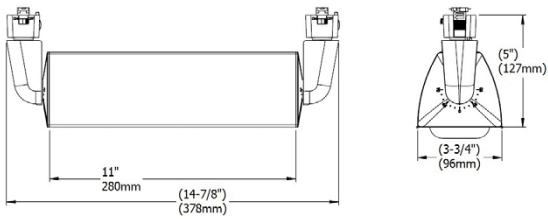


13128-15

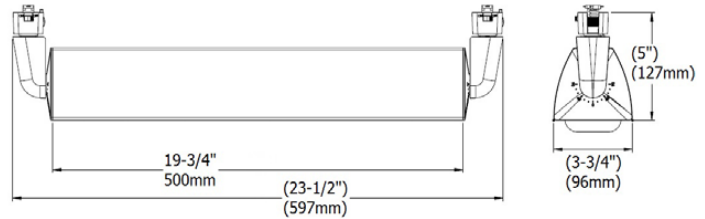

13128-23

OPTIONS

Parabolic Louver
PLV

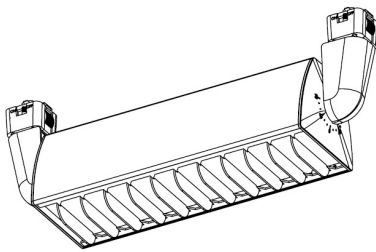


PRODUCT FAMILY ACCESSORIES

13000-TC	Track Channel
13000-LC	Linear Connector
13000-OA	Outlet Adapter
13000-SC	Slope Ceiling Track Adapter
13000-TB	T-Bar End Feed
13000-FC	Floating Canopy
13000-EC	Connector End Cap
13000-LC	Live End with Canopy
13000-LE	Live End
13000-L	L-Connector
13000-T	T-Connector
13000-X	X-Connector
13000-MC	Mini Connector
13000-CP	Cord and Plug Connector
13000-PA	Pendant Adapter
13000-CC	Conduit Connector
13000-CK	Conduit Continuation Kit

PHOTOMETRY

13128-15

Footcandles on Wall




Distance from ceiling	Single Unit						
	0'	1'	2'	3'	4'	5'	
1'	69	67	54	33	17	8	
2'	63	61	50	31	17	9	
3'	53	55	44	30	17	9	
4'	36	38	32	23	14	9	
5'	24	26	22	17	11	7	
6'	14	15	13	10	8	6	
7'	9	10	9	8	6	5	
8'	6	6	6	5	4	4	
9'	4	4	4	4	3	3	

4'		
97	94	97
91	89	91
81	80	81
62	62	62
44	45	45
30	30	31
21	22	23
16	17	17
12	12	12

Multiple Units		
78	51	77
73	49	72
63	47	62
45	39	46
33	30	33
22	21	22
16	16	16
12	12	12
9	9	9

8'		
72	25	72
65	25	66
60	25	56
42	22	40
29	18	28
18	14	18
13	11	13
10	9	10
7	7	7




Distance from ceiling	Single Unit						
	0'	1'	2'	3'	4'	5'	
1'	43	43	37	26	16	9	
2'	41	41	35	25	16	10	
3'	38	38	33	24	16	10	
4'	30	31	27	21	14	10	
5'	22	23	21	17	12	8	
6'	15	16	14	12	9	7	
7'	11	11	10	9	7	6	
8'	8	8	7	7	6	4	
9'	5	5	5	5	4	3	

4'		
71	71	72
70	70	71
66	67	67
57	58	59
45	47	47
34	35	36
26	27	27
20	21	21
15	16	16

Multiple Units		
53	44	53
52	44	52
49	43	49
42	39	42
33	32	33
25	24	25
19	19	20
15	15	15
11	12	12

8'		
47	26	47
45	26	46
43	26	42
36	25	35
28	21	28
21	17	21
16	14	16
12	11	12
9	9	9



Distance from ceiling	Single Unit						
	0'	1'	2'	3'	4'	5'	
1'	28	28	26	20	14	9	
2'	28	28	25	20	14	9	
3'	27	27	25	19	14	10	
4'	24	24	22	18	13	10	
5'	19	20	18	15	12	9	
6'	15	15	14	12	10	7	
7'	11	11	11	10	8	6	
8'	8	8	8	7	6	5	
9'	6	6	6	5	5	4	

4'		
54	55	56
55	56	56
54	55	56
50	51	52
42	44	45
34	36	37
28	29	30
22	23	24
18	19	19

Multiple Units		
40	37	40
40	37	40
39	37	39
36	35	37
31	31	32
26	26	26
21	21	21
17	17	18
13	14	14


8'		
33	24	34
33	25	34
32	25	33
30	24	30
25	22	26
21	19	21
17	16	17
13	13	14
11	11	11

Footcandles are average and rounded off. Data for multiple units are based on a minimum of five units.

PHOTOMETRY

13128-23

Footcandles on Wall



		Single Unit					
		0'	1'	2'	3'	4'	5'
Distance from ceiling	1'	133	131	106	66	36	18
	2'	122	119	99	62	35	18
	3'	103	107	86	59	34	18
	4'	71	74	63	46	28	17
	5'	47	50	52	35	23	14
	6'	28	28	26	21	16	11
	7'	18	19	17	15	12	9
	8'	12	13	12	11	9	7
	9'	8	8	8	7	6	5


		
189	187	192
179	176	181
160	159	161
123	123	124
89	90	90
60	60	61
44	44	45
32	33	33
24	24	24

Multiple Units



153	103	150
141	100	139
123	94	121
89	78	90
65	59	64
43	41	44
31	32	32
23	24	24
17	18	18

139	53	140
127	53	129
116	51	110
82	45	79
58	37	55
36	29	36
26	23	26
19	18	19
14	14	14



		Single Unit					
		0'	1'	2'	3'	4'	5'
Distance from ceiling	1'	83	83	72	51	33	19
	2'	80	80	70	50	33	20
	3'	73	75	65	49	33	20
	4'	59	61	54	42	29	19
	5'	44	46	41	34	25	17
	6'	30	31	28	23	19	14
	7'	21	22	20	18	14	11
	8'	15	15	14	13	11	9
	9'	11	11	10	9	8	7


		
141	140	142
139	138	140
132	132	133
114	115	116
92	93	93
69	70	71
53	54	54
41	41	42
31	32	32

Multiple Units



105	88	104
102	88	102
96	85	96
82	77	83
66	63	66
49	49	50
38	38	39
29	30	30
22	23	23

		
90	56	92
88	53	89
81	53	83
69	49	70
54	52	55
40	35	41
30	28	31
24	23	24
18	18	18



		Single Unit					
		0'	1'	2'	3'	4'	5'
Distance from ceiling	1'	56	56	51	39	28	18
	2'	56	56	50	39	28	19
	3'	54	54	49	39	29	19
	4'	48	48	44	36	27	19
	5'	38	39	36	31	24	17
	6'	29	30	28	24	19	15
	7'	22	22	21	19	16	13
	8'	16	17	16	15	13	10
	9'	12	12	12	11	10	8

		
110	109	111
111	110	112
110	109	111
102	102	103
88	87	89
82	71	73
58	58	59
47	46	48
38	37	38

Multiple Units



78	73	79
79	74	80
77	74	79
72	70	73
62	61	63
51	51	52
41	42	43
33	34	35
27	28	28

		
65	48	67
65	49	67
63	49	65
58	48	60
50	43	51
41	37	42
33	31	34
26	26	27
21	21	22

COLOR TEMPERATURE GUIDE

