

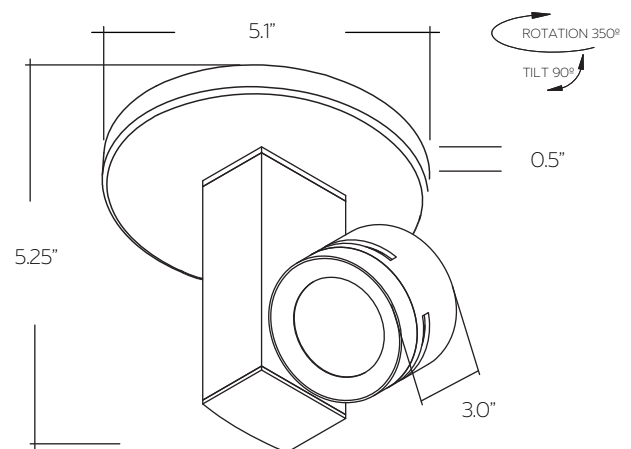
Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The specification grade 13306-M LED Adjustable Monopoint Light delivers direct monopoint lighting to commercial, hospitality and residential interior ceiling monopoint lighting applications. Architecturally styled LED monopoint lights feature small, unobtrusive size and are highly adjustable. Our modern LED monopoint light fixture designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more

FEATURES

Construction: Die-cast aluminum heat sink for optimal thermal management
Adjustability: 100° Adjustable Track head with 355° rotation
Voltage: 120V-277V AC, 50-60Hz
Wattage: 12.5W
Lumens: 700 lm
Installation: H-Track is standard; all tracks have adjustable adapters for use with single or two-circuit tracks. J-Style or L-Style is optional.
CRI: 80+
Life: 50,000 Hours
Dimming Driver: Internal TRIAC and ELV
Listings: RoHS, UL Listed, Dry and damp locations
Warranty: 5 Years Carefree for Parts & Components (Labor Not Included) Listings: cULus, RoHS Compliant




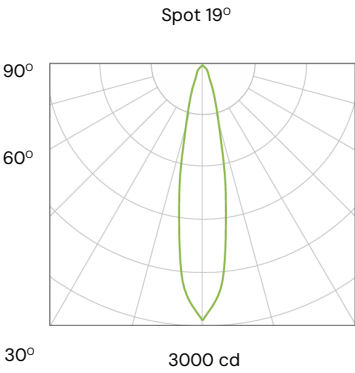
ORDERING INFORMATION Example:

Model	Color Temp	Optics	Monopoint Shape	Finish	Voltage
13306-M	27K 2700K 30K 3000K 40K 4000K	SP 19° Spot FL 30° Flood WF 45° Wide Flood	R Round S Square	BK Black WH White	120 20V 277 277V

PHOTOMETRY


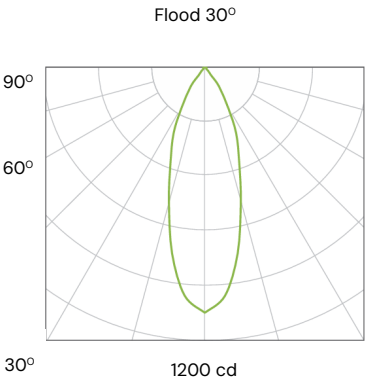
12.5W | 80CRI | 3000K
 DELIVERED OUTPUT: 592 LM | CBCP: 2982 CD | BEAM ANGLE: 19°

Center Beam Intensity	Beam Width	Height
2982 lx	38cm	1m
745 lx	76cm	2m
331 lx	113cm	3m
186 lx	151cm	4m
119 lx	189cm	5m


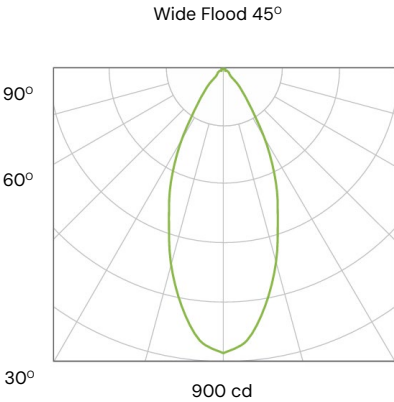
12.5W | 80CRI | 3000K
 DELIVERED OUTPUT: 575 LM | CBCP: 1126 CD | BEAM ANGLE: 30°

Center Beam Intensity	Beam Width	Height
1126 lx	68cm	1m
281 lx	136cm	2m
125 lx	203cm	3m
70 lx	271cm	4m
45 lx	339cm	5m

12.5W | 80CRI | 3000K
 DELIVERED OUTPUT: 590 LM | CBCP: 883 CD | BEAM ANGLE: 45°

Center Beam Intensity	Beam Width	Height
883 lx	84cm	1m
221 lx	169cm	2m
98 lx	253cm	3m
55 lx	338cm	4m
35 lx	422cm	5m

COLOR TEMPERATURE GUIDE

				
2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
✓	✓	X	✓	X