

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The Adjustable Monopoint Light delivers focused, high-performance LED illumination for commercial, hospitality, and residential interiors. Its compact, architecturally styled design suits offices, classrooms, retail spaces, museums, and hotels. With full tilt and rotation, it offers versatile beam control, while the integrated Class 2 driver maintains a clean, minimalist ceiling appearance.

FEATURES

Construction: Die-cast aluminum heat sink for optimal thermal management

Mounting: Monopoint

Beam Spread: Spot 19°, Flood 30° and Wide Flood 45°

Wattage: 29/ 37W

Color Temperature: 27/30/35/40K

Lumens: 2200/ 3000 lm

Voltage: 120-277VAC 50-60Hz

Dimming Driver: ELV, TRIAC


Power Factor: >.90

CRI: 80+

Life: 50,000 hours

Warranty: 5 Years carefree for parts & components (Labor not included)

Listings: cULus listed and RoHS Compliant. Suitable for dry and damp locations

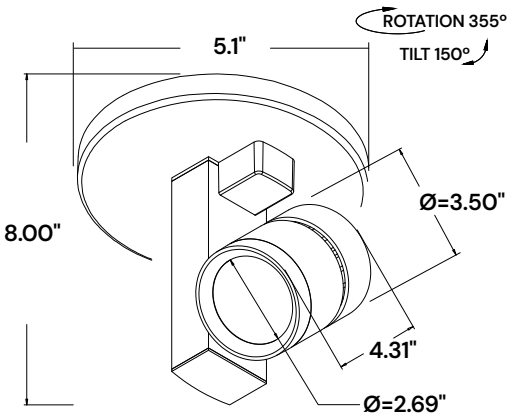

ORDERING INFORMATION Example:

Model	Wattage Lumens		Finish		Color Temp		Optics		Voltage	
13308-M	22	29W 2200 lm	WH	White	27K	2700K	19	Spot 19°	120	120V
	30	37W 3000 lm	BK	Black	30K	3000K	30	Flood 30°	277	277V
					35K	3500K	45	Wide Flood 45°		
					40K	4000K				

Alcon Lighting 13308-M Architectural LED Adjustable Monopoint Light

PHOTOMETRY

29W | 3000K | 2200 lm

Delivered Output: 2990 lm


CBCP: 10025 cd

Beam Angle: 19°

Center Beam Intensity	Beam Width	Height
8176 lx	15.35"	39.37"
2044 lx	30.71"	78.74"
908 lx	46.46"	118.11"
511 lx	61.81"	157.48"
327 lx	77.17"	196.85"



19° Spot

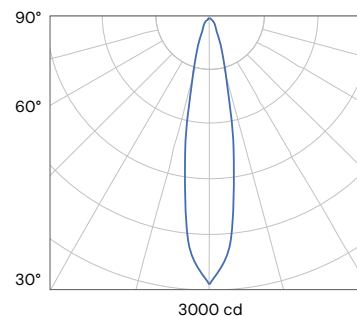


Delivered Output: 3024 lm


CBCP: 6148 cd

Beam Angle: 30°

Center Beam Intensity	Beam Width	Height
6859 lx	18.50"	39.37"
1715 lx	37.40"	78.74"
762 lx	56.30"	118.11"
428 lx	74.80"	157.48"
274 lx	93.70"	196.85"



30° Flood

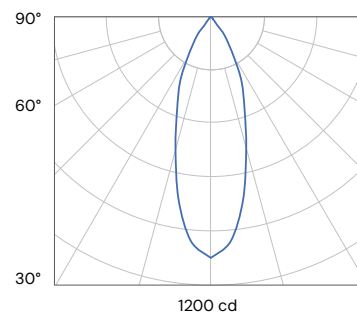


Delivered Output: 590 lm


CBCP: 883 cd

Beam Angle: 45°

Center Beam Intensity	Beam Width	Height
3516 lx	31.89"	39.37"
879 lx	63.78"	78.74"
390 lx	95.67"	118.11"
219 lx	127.56"	157.48"
140 lx	159.45"	196.85"



45° Wide Flood




PHOTOMETRY


37W | 3000K | 3000 lm

Delivered Output: 2990 lm
CBCP: 10025 cd
Beam Angle: 19°

Center Beam Intensity	Beam Width	Height
10009 lx	16.54"	39.37"
2502 lx	33.07"	78.74"
1112 lx	49.61"	118.11"
626 lx	66.54"	157.48"
400 lx	83.07"	196.85"




19° Spot

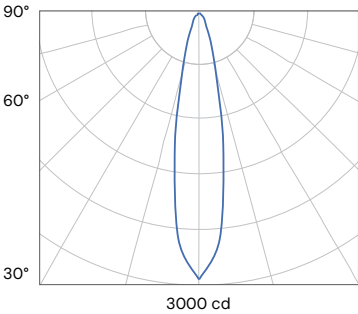


Delivered Output: 3024 lm
CBCP: 6148 cd
Beam Angle: 30°

Center Beam Intensity	Beam Width	Height
8408 lx	20.47"	39.37"
2102 lx	40.94"	78.74"
934 lx	61.42"	118.11"
526 lx	81.89"	157.48"
336 lx	102.36"	196.85"




30° Flood

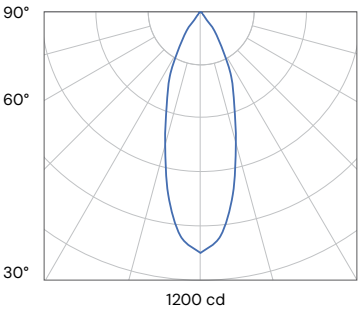


Delivered Output: 590 lm
CBCP: 883 cd
Beam Angle: 45°

Center Beam Intensity	Beam Width	Height
6148 lx	26.38"	39.37"
1537 lx	52.76"	78.74"
683 lx	79.13"	118.11"
384 lx	105.51"	157.48"
246 lx	131.89"	196.85"



45° Wide Flood

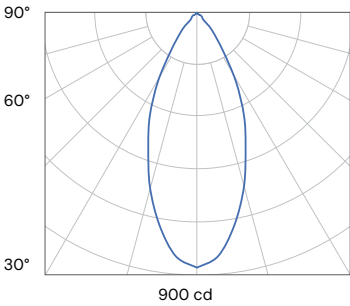

COLOR TEMPERATURE GUIDE

