


INTENDED USE

The Illusione 3-Inch Architectural LED Square Trimless Recessed Light Fixture delivers clean, glare-free downlighting through a frosted lens, blending seamlessly into ceilings for a minimalist aesthetic. Engineered for versatility, it enhances homes, restaurants, hotels, retail stores, offices, classrooms, galleries, and even beauty salons, offering architects and designers a durable, energy-efficient solution with refined visual comfort.



PRODUCT FAMILY

- 14006 | Lensed Recessed Down Light
- 14006-2 | Open Reflector Recessed Down Light
- 14006-3 | Lensed Wall Wash
- 14006-4 | Open Reflector Wall Wash
- 14006-5 | Flanged Recessed for Wet Location

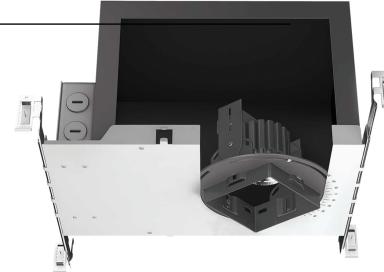

FEATURES

Construction: Seamless die-cast with IC rated housing with loose-fill blown and rolled insulation

Collar Bracket: 90° rotation in 5° increments (pre-drywall installation)

Finish: White

Lamp Holder: 35° tilt, 11/2" Vertical lamp source adjustment

Mounting: Housing for new construction installation only. (2) 24" adjustable hangar bars w/ 90° repositioning

Lens: Frosted

Power Connection: LED lamp array is replaceable via on board quick disconnect terminal

Voltage: 120/277 UNV

Wattage: 12W (IC Rated), 19W (Non-IC Rated)

Lumens: 600 lm (IC Rated), 1200 lm (Non-IC Rated)

Driver: Electronic direct current LED driver integrally mounted in electric junction box

CRI: 80+



Life: 50,000 hours

Warranty: 5 Years carefree for parts & components (Labor not included)

Listings: cETLus listed, suitable for Damp locations.

Title 24 / JA8 compliant certified by CEC.

Assembled in USA

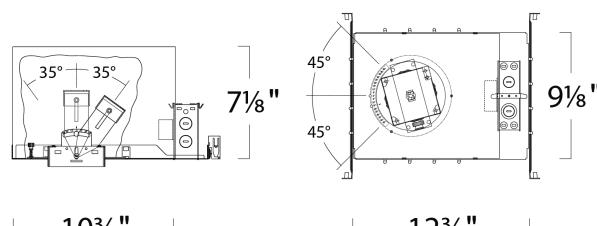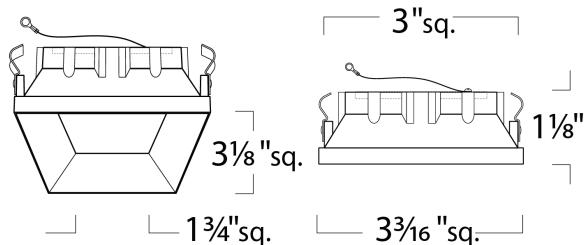

ORDERING INFORMATION Example:

Model	Wattage Lumens	Beam Spread	Color Temp	Dimming	Options			
14006	12	12W/600 lm (IC Rated)	45° 45° Narrow Flood	27K 2700K 27C 2700K (90+ CRI) 30K 3000K 35K 3500K 40K 4000K WD Warm Dimming (1850K-2700K)	Blank 010	Non-Dimming 0-10V, 5-Wire	WL ² XEM25	Wet Location 25W External Emergency Battery (Above Ceiling Access Required)
14006-2								
14006-3	19	19W/1200 lm (Non-IC Rated)						
14006-4								
14006-5								

¹ Only available for 12W

² Wet Location only available for 14006-5 (flanged)

COMPATIBLE DIMMERS



0-10 V

[2100](#)

[2101](#)

[2102](#)

COLOR TEMPERATURE GUIDE

