ALCON LIGHTING

SPECIFICATION SHEET

Shop Now

Project Name: _____ Type: _____ Quantity: _____

Alcon Lighting 14010 Recessed Wattage Selectable Indirect LED Downlight Troffer

INTENDED USE

This architectural-grade recessed wattage selectable LED troffer is available in 2' X 2' and 2' X 4' dimensions for a maximum 7,000 lumen output. The indirect LED light reflects off of the contemporary lens design to bounce back as downlight. The 120-277V troffer is ideal for commercial applications including office buildings and medical facilities. Wattage selectable switch offers 21, 28, and 32 watts.

FEATURES

Construction: Cold Rolled Steel
Optics: Transparent Vertical Fin
Finish: White
Voltage: 120-277V 50/60 Hz Constant Current
Dimming: 010V Dimming
CRI: 80+
Life: 70,000 Hrs
Operating Temperature: -4°F ~ 130°F (-20°C ~ 55°C)
Listing: cULus, DLC
Warranty: 7 Years Carefree for Parts & Components (Labor Not Included)



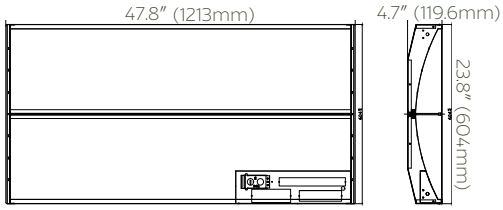

Size	Wattage	Lumens
2' x 2'	21W, 28W, 32W	2310lms, 3080lms, 3520lms
2' x 4'	35W, 50W, 64W	3850lms, 5500lms, 7040lms

SPEC GRADE · LIMITED 7-YEAR WARRANTY · c UL us LISTED · DLC QPL LISTED

ORDERING INFORMATION Example: (14010-22-35K)

Model	Size	Color Temperature	Options
14010	22 2x2 24 2x4	35K 3500K 40K 4000K 50K 5000K	7EM 700lms Emergency Backup 14EM 1400lms Emergency Backup 20EM 2000lms Emergency Backup