

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Using T8 LED bulbs to deliver clear light, our RFT series parabolic LED troffer offers exceptional performance and versatility for office lighting as well as classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The commercial LED lighting T8 LED bulb troffer light is available in standard lengths of 1x4, 2x2 and 2x4.

AVAILABLE SIZES

1x4 | W 11.75" x L 48" x D 5.5"

2x2 | W 23.75" x L 24" x D 5.5"

2x4 | W 23.75" x L 48" x D 5.5"

FEATURES

Construction: Die-formed and embossed code 22 gauge steel. Louvers are formed in aluminum.

LED: Uses T8 LED lamps (bulbs included)

Mounting: Recessed inverted T-Bar ceilings. Grid mount.

Finish: High reflectance baked white enamel, with black reveal support rails
Installation: Wiring knockouts are provided on back and end of housing. Ballast cover or reflector snaps into place; no tools required for ballast access.


Voltage: 120-277V (50/60 Hz)

CRI: 80+

Life: 50,000 hours

Warranty: 5 years carefree for parts & components (labor not included)

Listings: UL Listed, Suitable for damp location, Assembled in the USA

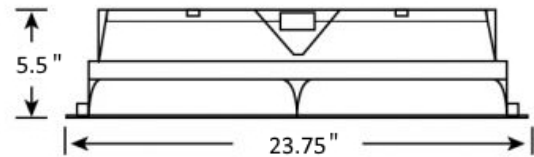

ORDERING INFORMATION Example: (14015-22-45-35K)

Model	Size	Wattage Lumens Louver Cells Dimming	Color Temp	Options
14015	14 1x4	<small>1x4 Options</small> 36 36 Watts 2400 lms 8 Cells (2x4) 0-10V Dimming	35K	WP
		36N 36 Watts 4500 lms 8 Cells (2x4) Non-Dimming	3500K	6FT Whip, 3/18ga
	22 2x2	<small>2x2 Options</small> 45 45 Watts 3600 lms 9 Cells (3x3) 0-10V Dimming	40K	WP10
		60 60 Watts 4800 lms 9 Cells (3x3) 0-10V Dimming	4000K	6FT Whip, 4/18ga
		45N 45 Watts 5625 lms 9 Cells (3x3) Non-Dimming	50K	EM5
		60N 60 Watts 7500 lms 9 Cells (3x3) Non-Dimming	5000K	5W Remote Emergency Battery Backup
	24 2x4	<small>2x4 Options</small> 3612 36W 2880 lms 12 Cells (3x4) 0-10V Dimming	EM12	12W Remote
		3618 36W 2880 lms 18 Cells (3x6) 0-10V Dimming	Emergency Battery Backup	
		5418 54W 6300 lms 18 Cells (3x6) 0-10V Dimming		
		7218 72W 8000 lms 18 Cells (3x6) 0-10V Dimming		
		7232 72W 8000 lms 32 Cells (4x8) 0-10V Dimming		
		3612N 36W 4500 lms 12 Cells (3x4) Non-Dimming		
3618N 36W 4500 lms 18 Cells (3x6) Non-Dimming				
5418N 54W 6750 lms 18 Cells (3x6) Non-Dimming				
7218N 72W 9000 lms 18 Cells (3x6) Non-Dimming				
7232N 72W 9000 lms 32 Cells (4x8) Non-Dimming				