

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Our 14031-1 architectural 3-inch square LED recessed light is designed for new construction installation only. The energy-efficient LED housing with IC rating for direct contact with loosefill blown and rolled insulation is standard. Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (less than 2.0 CFM-cubic feet per minute).

FEATURES

Adjustability: Collar bracket provides 90° of rotation, in 5° increments for positioning before drywall installation


Mounting: (2) 24" adjustable hanger bars with 90° repositioning ability supplied. Lamp holder assembly allows 35° tilt and 1-1/2" vertical lamp source adjustment

Driver: Electronic direct current LED driver integrally mounted in electric junction box

Dimming: Non-dimming is standard. 120/277V universal dimming that works with most 3-wire ELV, 2-wire Incandescent and 5-wire 0-10V dimmers is available CRI: 80 standard; 90+ CRI option

Warranty: 1 year carefree for parts & components (Labor not included).

Listings: cETLus Listed. High Efficacy Luminaire Certified by the California Energy Commission (CEC) as Title 24/JA8 Compliant. Damp-location, Assembled in the US.

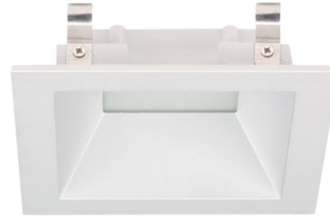


Ordering Information: Example: (14031-1-12-30K-UNI-45)

Model	Trim	Wattage/Lumens	Color Temperature	Driver	Beam Spread	Additional Options
14031	1 Downlight Lensed	12 ¹ 12 watts /600lumens	27K 2700K	(Blank) Non-dimming ^{Standard}	45 45° Narrow Flood ^{Standard}	WL Wet Location ²
	2 Downlight Open	19 ¹ 19 watts /1200lumens	30K 3000K ^{Standard}	UNI TRIAC, ELV and 0-10V Compatible	25 25° Spot	EM Emergency Remote (SW; Above ceiling access required)
	3 Wall Wash Lensed		35K 3500K		60 60° Wide Flood	
	4 Wall Wash Open		40K 4000K			
			27K-C90 2700K 90+ CRI			
			30K-C90 3000K 90+ CRI			
			27K-C97 2700K 97+ CRI			
			30K-C97 3000K 97+ CRI			


¹ 12 Watts option is IC-Rated, 19 Watts is not rated for Insulation Contact
² Only available with lensed trim type

Trim Dimensions


14031-1 (Downlight Lensed)

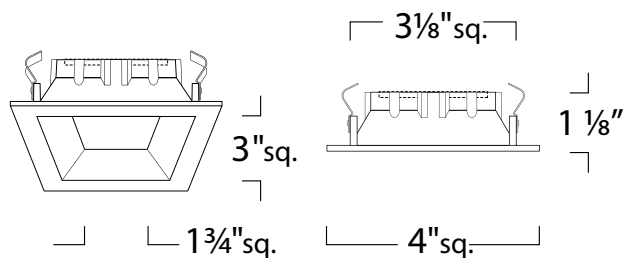


14031-2 (Downlight Open)

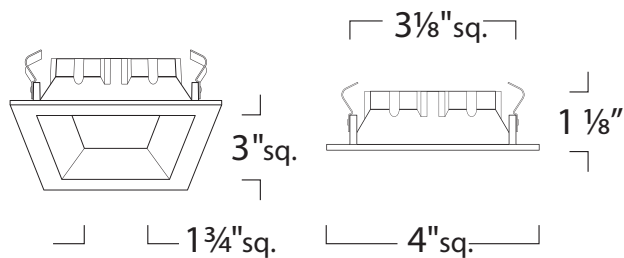



14031-3 (Wall Wash Lensed)

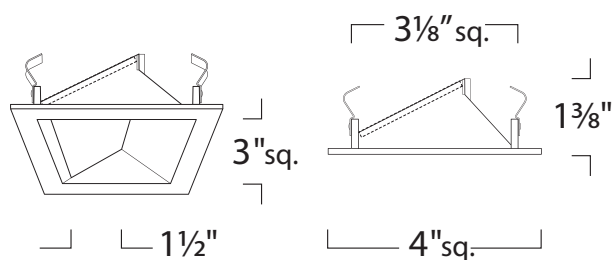

14031-4 (Wall Wash Open)

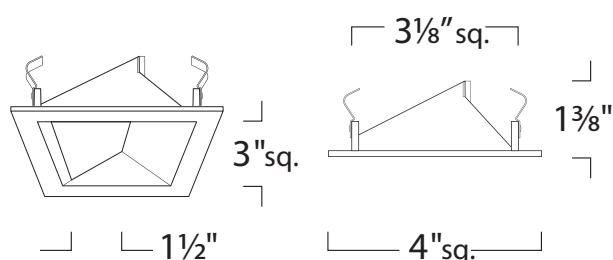

3" Square LED Housing

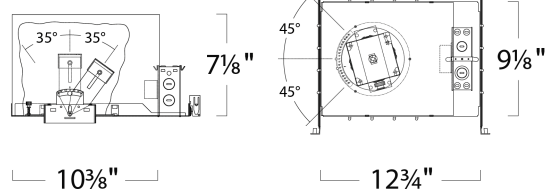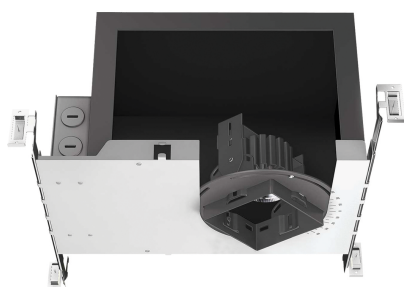

COLOR TEMPERATURE GUIDE

