

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Designed for ceiling installation, this adjustable outdoor recessed downlight delivers durable, high-performance lighting in wet, damp, or tamper-prone environments. Its die-cast, vandal-resistant aluminum housing and shatterproof lens make it ideal for correctional and behavioral facilities, schools, bathrooms, coastal areas, and covered outdoor spaces. Optional marine-grade finish offers added protection against corrosion.

FEATURES

Construction: High-grade diecast aluminum
Lumens: 700 lm
Wattage: 9W
Color Temperature: 27/30/35/40K
Beam Spread: 45° Flood and 60° Wide Flood options
Mounting: Fits standard junction boxes with 4-3/8" or 6-1/2" ceiling cut-outs, supporting ceiling thicknesses up to 1-1/4". Power Cord option includes a 3' cord for easy installation
Emergency Battery: External 90 min. w/ test switch
Driver: 0-10V, ELV, TRIAC
Voltage: 120-277VAC
CRI: 80+
Warranty: 5 Years carefree for parts & components (Labor not included)
Listings: cETLus listed for wet locations, Dark Sky compliant, IP65 rated, Assembled in USA



ORDERING INFORMATION Example:


Model	Size	Finish	Color Temp	Beam Spread	Mount	Options
14078-ADJ	4 4" 6 6"	WH White BK Black SL Silver BZ Bronze	27K 2700K 30K 3000K 35K 3500K 40K 4000K	45 45° Flood 60 60° Wide Flood	JB ² J-Box PC ¹ 3' Power Cord	MG Marine Grade XEM External Emergency Backup HL Hex-Cell Louver

¹ Custom lengths available. Please consult factory.
² Includes attached J-box.

LINE DRAWINGS & DIMENSIONS


4"

Junction Box

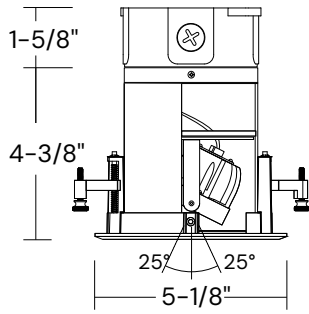


Ceiling Cut-Out: 4-3/8"
Ceiling Thickness: 1-1/4" Max

Power Cord

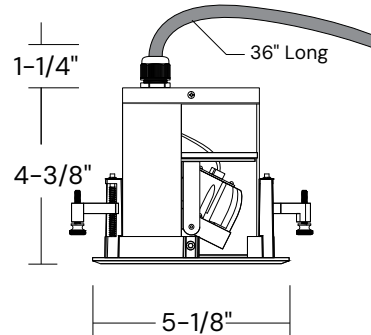


Inner Diameter




6"

Junction Box

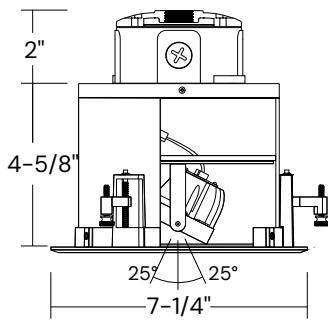


Ceiling Cut-Out: 6-1/2"
Ceiling Thickness: 1-1/4" Max

Power Cord

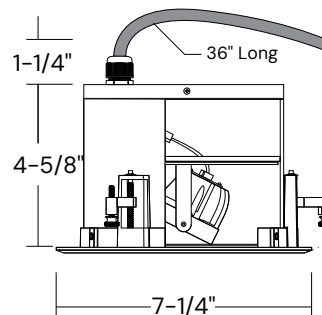

Inner Diameter

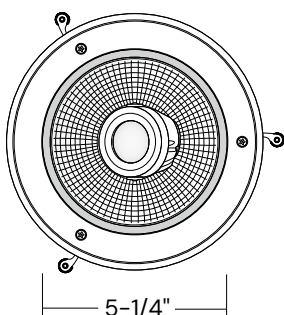

COLOR TEMPERATURE GUIDE

