

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Designed for ceiling installation, this outdoor recessed downlight delivers efficient, high-quality illumination for wet, damp, or tamper-prone areas. Its die-cast, vandal-resistant aluminum housing and shatterproof lens are ideal for use in prisons, behavioral and correctional facilities, schools, coastal environments, bathrooms, and outdoor covered spaces. Optional marine-grade finish enhances corrosion resistance.

FEATURES


Construction: High-grade diecast aluminum
Lumens: 1000/1500/2200/2600 lm
Wattage: 10/15/22/26W
Color Temperature: 27/30/35/40/50K
Beam Spread: 10° Narrow Spot, 20° Spot, 45° Flood, 60° Wide Flood, 30° x 60° Asymmetric and Wallwash options
Mounting: Fits standard junction boxes with 4-3/8" or 6-1/2" ceiling cut-outs, supporting ceiling thicknesses up to 1-1/4". Power Cord option includes a 3' cord for easy installation
Emergency Battery: External 90 min. w/ test switch
Driver: Universal dimming (120V/277V)
Voltage: 120-277VAC
CRI: 90+
Warranty: 5 Years carefree for parts & components (Labor not included)
Listings: cETLus listed for wet locations, Dark Sky complaint, IP65 rated, Assembled in USA



4"



6"



ORDERING INFORMATION Example:

Model	Size	Wattage Lumens	Finish	Color Temp	Beam Spread	Mount	Options
14078	4 4"	10 10W 1000 lm	WH White	27K 2700K	10 10° Narrow Spot	JB Internal J-Box	MG Marine Grade
	6 6"	15 15W 1500 lm	BK Black	30K 3000K	20 20° Spot	PC ³ 3' Power Cord	XEM External Emergency Backup
		22 ¹ 22W 2200 lm	SL Silver	35K 3500K	45 45° Flood		HL ⁴ Hex-Cell Louver
		26 ¹ 30W 2600 lm	BZ Bronze	40K 4000K	60 60° Wide Flood		FL Frosted Lens
				50K ² 5000K	36 30° x 60° Asymmetric		
					WW Wallwash		

¹ Not available for 4".

² Available only in 80+ CRI.


³ Custom lengths available. Please consult the factory.

⁴ Not compatible with 1000 lm and 10° Narrow Spot options.

LINE DRAWINGS & DIMENSIONS


4"

Junction Box

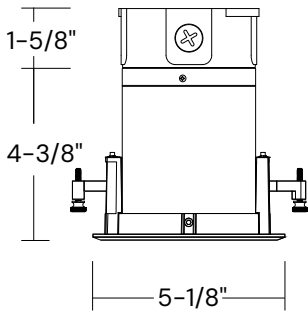


Ceiling Cut-Out: 4-3/8"
Ceiling Thickness: 1-1/4" Max

Power Cord

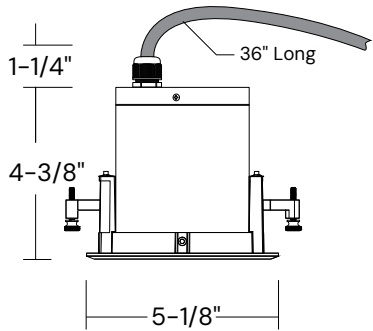


Inner Diameter

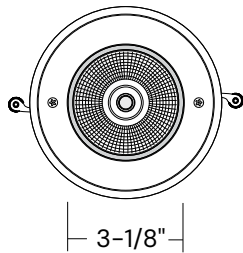


6"

Junction Box

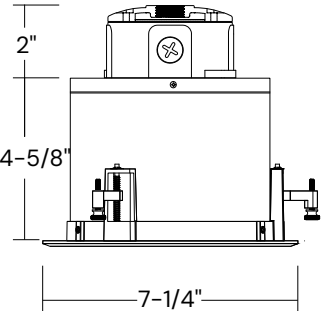


Ceiling Cut-Out: 6-1/2"
Ceiling Thickness: 1-1/4" Max

Power Cord

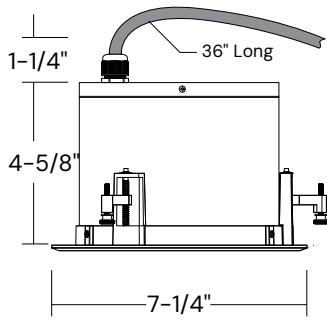

Inner Diameter

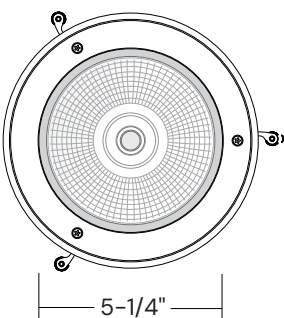

COLOR TEMPERATURE GUIDE

