

INTENDED USE

Our contemporary architectural-grade LED troffer delivers uniform, high-brightness illumination with an indirect design for low-glare comfort. Available in two sizes, it's ideal for recessed installation in commercial offices, hospitality spaces, healthcare settings, and retail environments—enhancing visual comfort while supporting modern design standards.




FEATURES

- Construction:** Formed code-guage steel housing. The housing is treated to prevent rust
- Finish:** Matte white polyester powder
- CRI:** 82+
- Voltage:** 120–277V (Universal)
- Dimming Driver:** 0–10V (Dim to 1%)
- Life:** 60,000 Hours
- Power Factor:** >0.9
- Emergency Battery (External):** 12W, 1200 lm
- Operating Temperature:** -22°F (-30°C) to 122°F (50°C)
- Listing:** IESNA LM-79 and LM-80 tested. ETL and cETL Listed. RoHS compliant. Made in the USA
- Warranty:** 5 years carefree for parts & components (Labor not included)



ORDERING INFORMATION Example:

Model	Size		Wattage Lumens		Color Temperature		Options
14087	22	2'x2' Foot	25	25W 4000 lm	27K	2700K	XEM12 12 Watts Emergency Battery (External)
	24	2'x4' Foot	31	31.3W 5000 lm	30K	3000K	
			43	43.8W 7000 lm	35K	3500K	
					40K	4000K	
					50K	5000K	

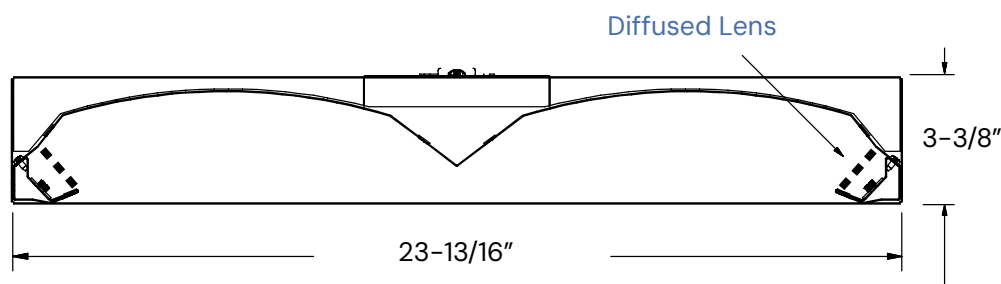

2'x2' Foot Length: 23-13/16"
2'x4' Foot Length: 47-13/16"

COLOR TEMPERATURE GUIDE

