

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Approved for wet locations, this slim and shallow recessed downlight offers field-adjustable wattage switching, allowing flexible power usage to suit various applications. This versatile downlight features a durable, die-cast metal construction and is crafted to precise specifications.

FEATURES

Construction: Heavy-duty die-cast aluminum

Lens: Frosted polycarbonate

Mounting: Suitable for 4" recessed junction boxes

Finish: White

Color Temperature: 5000K Daylight

Voltage: 120-277VAC, 50-60Hz


CRI: 80+

Dimming: 0-10V dimming

Rated Life: 54,000 hours

Warranty: 5-year warranty on parts and components (labor not included)

Listings: DLC, cULus Wet Location Rated, BBA Compliant, TAA Compliant

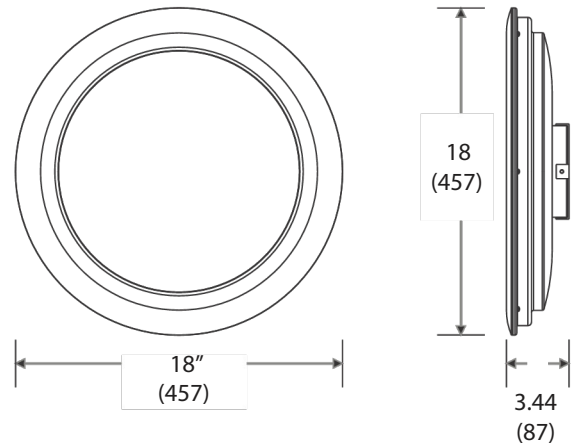

Ordering code example: **14136-20-5K-OPS**

Model	Wattage Lumens		Color Temp		Options
14136	20	20 W 2600 lm	5K	5000K Daylight	OPS Daylight Harvesting Occupancy Sensor
	37	37 W 4810 lm			BAA Made in USA (Buy American Act)
	53	53 W 6890 lm			TAA Trade Agreements Act
	71	71 W 9230 lm			