

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This LED lightbar delivers smooth, uniform illumination without hot spots, making it ideal for undercabinet lighting in kitchens, shelving, workstations, and design-focused areas where lighting enhances both function and aesthetics. It eliminates shadows, brightens dark corners, and offers a warm, dimmable glow. Linkable up to 300W, it includes mounting and support brackets, seamless coupling, and multiple knockouts for easy wiring and installation.

FEATURES

Construction: Die-cast aluminum, polycarbonate lens

Mounting: Surface mount

Finish: White

Dimensions: 1.1" W x 0.94" H

Wattage: 7W per Ft

Color Temperature: 27/30/40K

Lumens: 490 Lumens per Ft

Voltage: 120V (ELV Dim)

Dimming Driver: ELV

Power Factor: > 0.9

Operating Temperature: 14°F (-10°C) to +104°F (+40°C)

CRI: 90+

Life: 50,000 hours

Warranty: 5 Years carefree for parts & components
(Labor not included)

Listings: ETL, Title 24 JA8 Compliant



MODEL	WATTAGE	LUMENS
14220-12	7W	490 lm
14220-18	10W	700 lm
14220-24	13.5W	945 lm
14220-32	17W	1150 lm
14220-48	27W	1890 lm



ORDERING INFORMATION Example:


Model	Length		Color Temp		Options	
14220	12	12"	27K	2700K	JB ¹	Junction Box
	18	18"	30K	3000K	HC	72" Hardwire Connector
	24	24"	40K ³	4000K	PF	72" Power Feed Cable
	32	32"			IC ^{xx2}	Interlink Cable
	48	48"				

¹ Dimensions: L 6.25" x W 3.6" x H 1.0".

² Please specify length, see pg. 2.

³ Available only with 12" and 48" sizes.

LINE DRAWINGS & DIMENSIONS

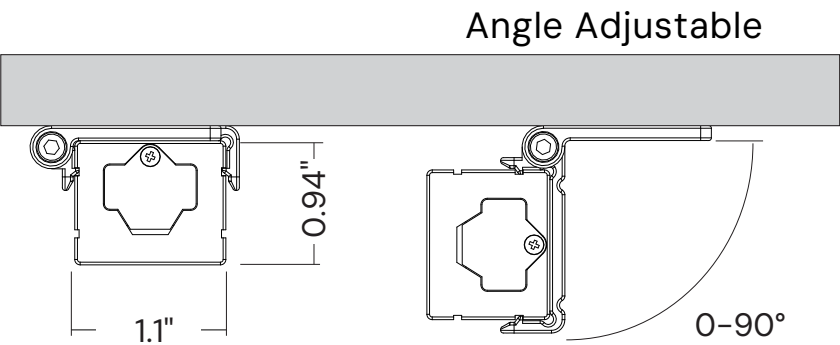

ACCESSORIES

JUNCTION BOX | Direct Wire



HARDWARE CONNECTOR | Hardware connector for LBR Series



SUPPORT BRACKET | For Seamless Connection (Included)



POWER FEED CABLE | AC Direct Plug-in Cable



SEAMLESS COUPLING (Included)



INTERLINK CABLE | Allows LBR fixtures to link Together

6	6" Interlink Cable
12	12" Interlink Cable
24	24" Interlink Cable
72	72" Interlink Cable

MOUNTING BRACKETS (Included)



COLOR TEMPERATURE GUIDE

