

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

The **Polo Architectural LED Dual Head Emergency Unit** features bright illumination with a fire and impact resistant housing for durability. The Polo is an ideal option for outdoor applications where emergency lighting is needed.

### FEATURES

**Construction:** Injection-Molded, Engineering Grade, 5VA Flame Retardant, High-Impact Resistant Thermoplastic

**Electrical:** Fully Automatic Solid-State, Two Rate Charger

6V Maintenance-Free, Rechargeable Sealed Lead Acid Battery

**LED:** 7W High Performance MR-16 Lamp

**Mounting:** Surface via Easy Connect Back Plate

Suitable for Wall Mount

**Voltage:** 120/277

**Wattage:** 7W

**Operating Temperature:** 68°F (20°C) – 104°F (40°C)

**Warranty:** 5 years carefree for parts & components (Labor not included). Battery Pro-Rated for 2 Years


**Listings:** Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local, and State Codes  
UL Listed for Damp Location




16101-W



16101-G-WL

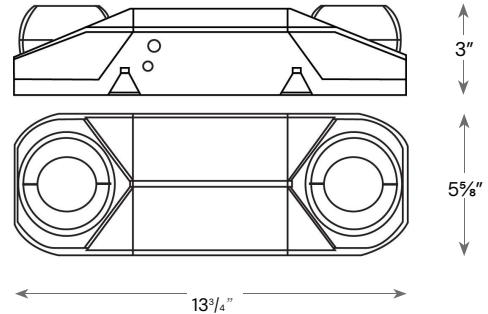

Non-Wet location Rated

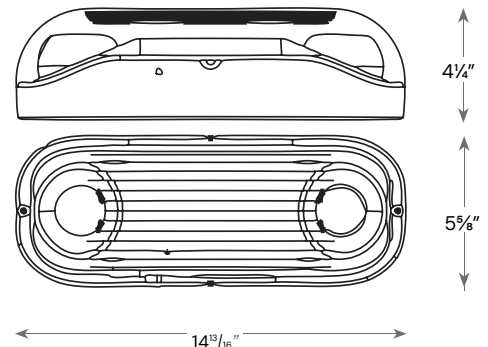

Wet location Rated



### ORDERING INFORMATION Example: 16101-WL

Model	Finish	Options
16101	WH <sup>1</sup> White BK Black G <sup>2</sup> Gray	WL <sup>3</sup> Wet Location USA Assembled in USA

<sup>1</sup> Not available in Wet Location rated option.  
<sup>2</sup> Only available in Wet Location rated option.  
<sup>3</sup> Gray finish is standard, Black finish available.