

FIXTURE SPECIFICATIONS

INTENDED USE

The 16105 adjustable emergency recessed LED light fixture features four adjustable heads for emergency lighting with a lightweight, flame retardant design. The 16105 is ideal for spaces such as class rooms, offices, and commercial areas that require emergency lighting applications.

FEATURES:

Construction: Injection-molded, engineering grade, 5VA flame retardant, impact-resistant, thermoplastic.

Adjustable Lamp Heads: Adjustable LED lamp heads provide up to 50-ft center-to-center spacing with a 3-ft path of egress at 12-ft mounting height.

Mounting: Bar hangers included are compatible with drywall or drop ceiling mount installations

LED Indicator: Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery). Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

Voltage: 120-277VAC, 50-60Hz

Wattage: 1.0 watt per head



Battery Type: 4.8V long-life, maintenance-free, rechargeable nickel metal hydride battery.

Self-Diagnostic Option: Performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

Listings: Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. UL Listed for damp locations

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Both rectangular and oval trim plate are included.

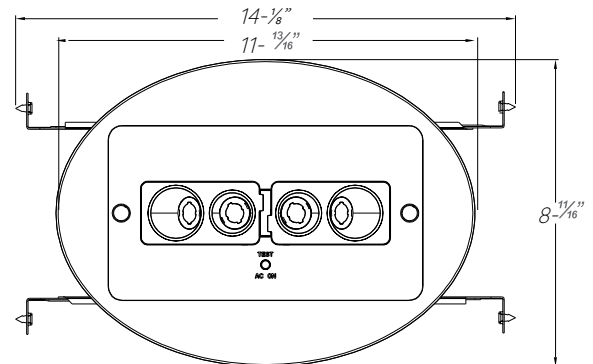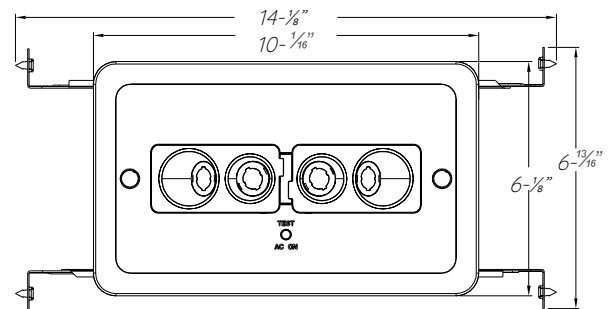

ORDERING INFORMATION EXAMPLE: (16105-R-WH)

Model	Finish	Options
16105	WH White BK Black	SD Self-diagnostic

