

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The Alcon Lighting 16106 Compact Thermoplastic LED Exit Sign utilizes ultra-bright red or green LEDs for improved visibility. This product is compact and energy efficient. Mounting hardware provided. Assembled In USA & UL listed for damp locations.

FEATURES

Construction: Injection-molded, high-impact, engineering-grade thermoplastic with 5VA flame-retardant rating for enhanced durability and safety

Mounting: Snap mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount

Universal Single/Double Face: Ships single face. Includes material to convert to double face


Voltage: 120/277 voltage

Optional Self- Diagnostics: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes

Optional Emergency Backup: 1.2V Long life, maintenance-free, rechargeable NiCd battery.

Warranty: 5 Years Carefree for Parts & Components
(Labor Not Included)

Listing: UL Listed for damp locations (0°C to 50° C) and compliant with UL 924, NFPA 101 Life Safety Code, NEC, OSHA, and applicable local and state codes. Certified to meet California Energy Commission (CEC) Title 20 regulations.

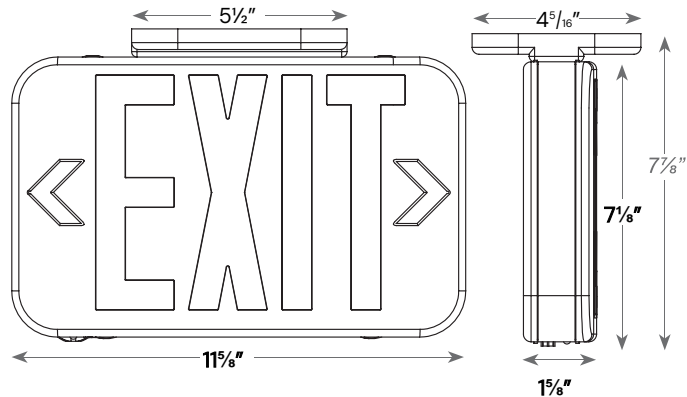

ORDERING INFORMATION Example: 16106-R-WH-AC

Model	Letter Color	Housing Finish	Operation	Options
16106	R Red G Green RG¹ Red/Green	WH White Face/ White Housing BK Black Face/ Black Housing	AC AC-only 2A Dual circuit (120V) 2B Dual circuit (277V)	SDT^{2,3} Self Diagnostics SW³ Special Wording Sign ³ EM Battery Back-up

¹ Field selectable
² Available only with -EM units.
³ Not available with -RG units.