

FIXTURE SPECIFICATIONS

INTENDED USE

The 16113 Compact Wet Location LED Exit Sign is designed with 6" with 3/4" stroke letters for improved visibility. This product is compact and energy efficient. The 16113 is perfect for hotels, offices, retail outlets, restaurants, and more.

SIZE

L 12.5" x H 8.5"

ADDITIONAL SPECIFICATIONS

Universal wall or ceiling mounting. Canopy and mounting hardware provided.


Maintenance-free and rechargeable Ni-Cad battery; Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. 90 minute emergency illumination (minimum) with LVD (Low Voltage Disconnection) preventing battery from deep discharge.

5VA flame retardant; Fully gasket enclosure

NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

UL listed for wet locations (-20°C - 50°C / -4°F - 122°F)

Voltage: 120/277V

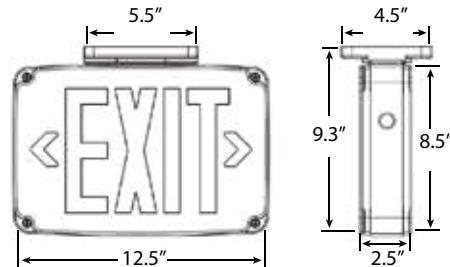

ORDERING INFORMATION Example: (16113-S-RD-AC-WW)

Model	# of Faces	Letter Color	Driver	Face Housing Finish	Options
16113	S	RD	AC	WW	SG
	Single	Red	AC Only	White White	Wire Steel Guard ¹
	D	GR	BB	WG	PSG
	Double	Green	Battery Back-Up	White Gray	Polycarbonate Vandal Shield Guard ²
			DC	WB	SD
			Dual Circuit	White Black	Self Diagnostic Test ³
					TR
					Tamper Proof Screws

¹ Steel Wire Guard dimensions: 13.5" x 15" x 6"

² Polycarbonate Vandal Shield Guard : 15" x 22" x 8"

³ Auto battery discharge once every 30 days and once every 12 months