

FIXTURE SPECIFICATIONS

INTENDED USE

The edge lit 16116 recessed LED exit sign is architecturally designed with 6" letters for improved visibility. This product is compact and energy efficient. UL listed for damp locations & meets UL924, NEC, NFPA 70 and the Life Safety Code, NFPA 101.

SIZE

L 12.5" x H 11"

FEATURES



Construction: Thermoplastic LED exit sign compact size low-profile design LED exit sign
Battery Back-Up: Optional maintenance-free and rechargeable Ni-Cad battery available
Mounting: Wall or ceiling mounting
Universal Single/Double Face: Ships single face. Includes material to convert to double face. Self-adhesive Chevron appliques and guide template provided for directional indication
Voltage: 120/277V dual voltage operation standard
Warranty: 5 years carefree for parts & components (labor not included) (battery prorated for 2 years)
Listings: UL listed for damp locations & meets UL924, National Electrical Code, NFPA 70 and the Life Safety Code, NFPA 101.



Project Name:

Type:

Quantity:

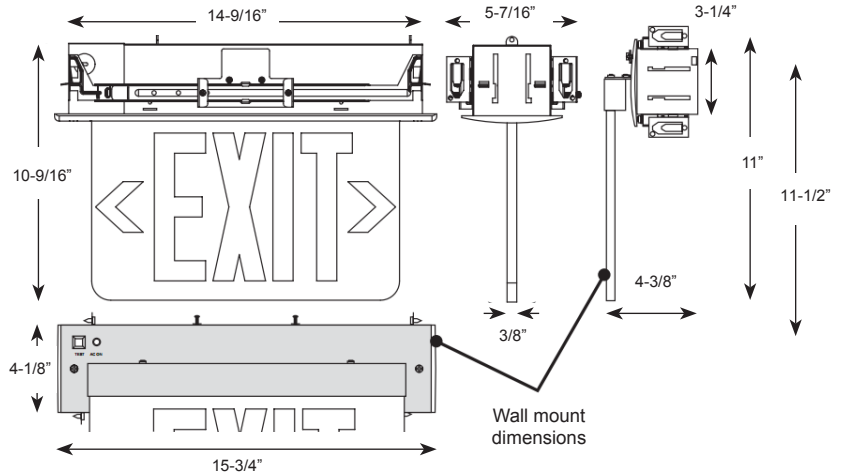

Wall mount option

ORDERING INFORMATION Example: (16116-S-RD-WH-CL-AT)

Model	# of Faces	Letter Color	Driver	Panel	Trim Plate Finish	Options
16116	S Single D Double	RD Red GR Green	WH Standard AC-only BL Battery Back up DC Dual Circuit	CL Standard Clear MR Mirror WH White	AT Aluminum Trim WH White BK Black	SDT Self Diagnostic Test SAL Special Wording Sign ARRA Assembled in USA for Buy American Act APV 208/220/240 Volt, 50/60Hz WM Wall Mount

¹ Clear panel is for single face only