

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The Alcon Lighting 16127 Compact Thermoplastic LED Exit Sign utilizes ultra-bright red or green LEDs for improved visibility. This product is compact and energy efficient. Mounting hardware provided. UL listed for damp locations.

FEATURES

Construction: Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Mounting: EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.

Universal Single/Double Face: Ships single face. Includes material to convert to double face.


Voltage: 120/277 voltage

Optional Emergency Backup: 1.2V Long life, maintenance-free, rechargeable NiCd battery.

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Listing: Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

UL Listed for damp locations (0°C – 50°C).
Certified to CEC under Title 20 Regulations.

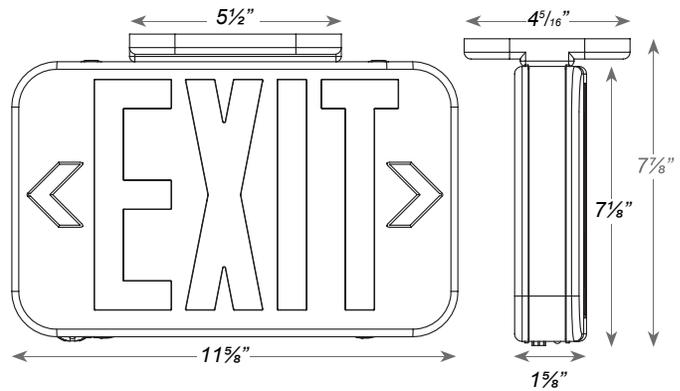

ORDERING INFORMATION Example: (16126-R-1-AL-E)

Model	Letter Color	Housing Finish	Options
16127	RD Red	WH White	EM Battery Backup
	GR Green	BK Black	