




Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

The specification-grade Alcon Lighting 31025 Architectural LED Sign Light provides energy-efficient illumination for exterior signage, combining functionality with a sleek design. Constructed from corrosion-resistant cast brass, it features a clear, heat-resistant tempered lens and a silicone gasket for watertight sealing. A removable shroud enhances versatility, ensuring durability and optimal performance in outdoor environments.

### FEATURES

- Construction:** Corrosion Resistant Cast Brass
- Lens:** Clear and heat resistant Tempered Lens
- Wiring:** Prewired with a 3' 18-2 SPT2-W direct burial cord
- Socket:** Top grade ceramic bi-pin with retention clip
- Gasket:** Silicone gasket for water tight sealing
- Knuckle:** Adjustable cast brass knuckle with thumb screw
- Mounting:** 1/2" NPT threaded female hub (1/2" NPT spike included)
- Beam Spread:** 38° Flood is standard, 15° Narrow and 60° Wide Flood are available
- Voltage:** 12V
- Wattage:** 5W
- Color Temperature:** 27/30/40/50K
- Lumens:** 500 lm
- CRI:** 80+
- Life:** 50,000 Hrs
- Warranty:** 5 years Carefree for parts & components (Labor not included)
- Listings:** cETLus Listed, Wet Location

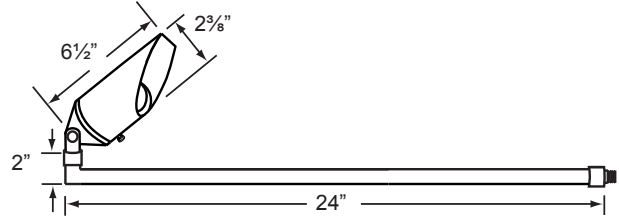

5" Wall Mount Canopy Included

Alcon Lighting 31025 Architectural LED Sign Light Fixture



### ORDERING INFORMATION Example:

Model	Stem Length	Beam Spread	Color Temp	Finish
31025	24 <small>Standard</small> 24"	<b>B15</b> <sup>1</sup> 15° Narrow	<b>27K</b> 2700K	<b>AB</b> Antique Bronze
	18 18"	<b>B38</b> 38° Flood	<b>30K</b> 3000K	<b>GM</b> Gun Metal
		<b>B60</b> <sup>1</sup> 60° Wide Flood	<b>40K</b> 4000K	
			<b>50K</b> 5000K	

<sup>1</sup> Available only with 2700K, delivering 350 lm