






IMPORTANT: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE ELECTRICAL CODES BY A QUALIFIED PROFESSIONAL FAMILIAR WITH ITS CONSTRUCTION, OPERATION, AND ASSOCIATED SAFETY HAZARDS. FOLLOW ALL SAFETY GUIDELINES DURING INSTALLATION. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

The 31029 Linear Sign Light is designed to allow quick and seamless continuous-run installations. The steps below outline how to connect two or more fixtures in a continuous run.

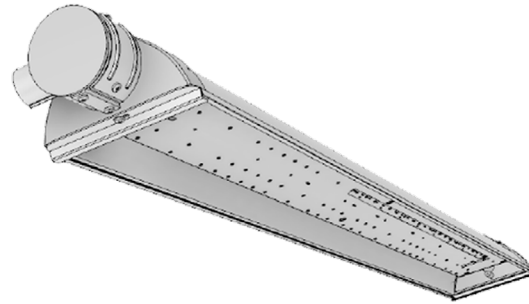

1. Remove the two fasteners closest to the fixture body and carefully remove the end cap.

2. Feed the wiring through the opening in the fixture.

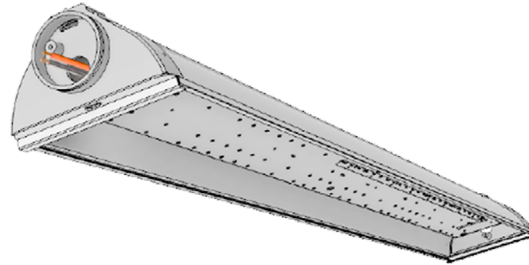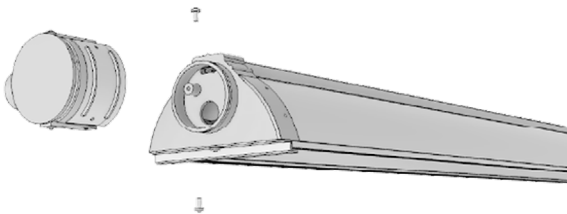

3. Connect the wiring from one fixture to the next.

4. On the next fixture, remove only the end cap, align the fixtures, and secure them together using the two fasteners.

