

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

The Vertical Baffled Louver Recessed Pathway and Step Light delivers low-profile illumination for steps, walls, and pathways in residential and commercial settings. Its clean, screwless die-cast aluminum housing integrates seamlessly into architectural surfaces while providing controlled, glare-reducing light. Suitable for interior and exterior use, it offers a reliable solution for enhancing safety and visual continuity along circulation paths.

### FEATURES

**Construction:** Die-cast aluminum housing with an integrated finned heat sink for efficient thermal management, maximizing heat dissipation and extending LED lifespan.

**Mounting:** Standard depth (1-1/2") single-gang junction box Driver: Not required

**Finish:** Seamless and screw-less die cast aluminum faceplate

**Dimming:** ELV, 3-Wire

**Voltage:** 120V

**Wattage:** 3.5W

**Lumens:** 240 lm

**CRI:** 80+



**Color Temperature:** 2850K

**Life:** L70, 50,000 hours

**Lamp Equivalent:** 10W Incandescent

**Listings:** ETL / cETL Listed. Assembled in USA.

IP65 Rated. ADA compliant and suitable for installation within 4ft of the ground.

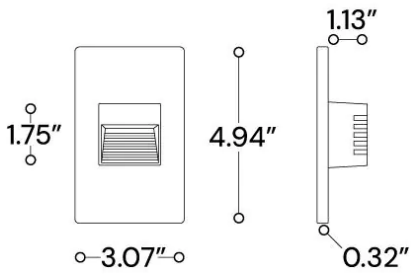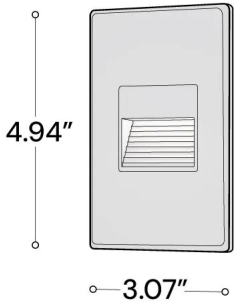

### ORDERING INFORMATION Example:

Model	Finish
9050	WH White BK Black

Alcon Lighting 9050 Vertical Baffled Louver Recessed Pathway and Step Light

## COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	X	X	X