

INTENDED USE


Our LED Bollard fixture is built from durable aluminum and engineered for outdoor use in commercial, hospitality, retail, and industrial environments. It offers selectable color temperature and wattage options for maximum versatility, and features Type V light distribution for uniform illumination in all directions. A removable photocell is included for added energy efficiency, and an optional glare shield is available to enhance visual comfort along pathways, walkways, entrances, and driveways.

FEATURES

- Construction:** Constructed from extruded aluminum alloy.
- Lens:** Impact-resistant polycarbonate lens
- Finish:** UV-stabilized, powder-coated bronze finish is standard. Silver and black finishes are available with extended lead times.
- Dimming Driver:** 0-10V dimming
- Wattage Selectable Switch:** Selectable from 10W/20W/30W
- Color Temperature Switch:** Selectable from 30K/40K/50K
- CRI:** 80+
- Operating Temperature:** -40°F ~ +104°F
- Life:** 50,000 Hours
- Warranty:** 5 Years carefree for parts & components (Labor not included)
- Listings:** UL Listed, DLC Listed, RoHS Listed, Wet Location



Wattage	Lumens
10 Watts	1,250 Lumens
20 Watts	2,500 Lumens
30 Watts	3,750 Lumens



Type V
Distribution



Flat



Flat with
Glare shield



Dome



Dome with
Glare shield




ORDERING INFORMATION Example: 9076-F-BZ


Model	Lens		Shape		Finish	Voltage	
9076	(Blank)	Clear	F	Flat	BZ	UNI	120-277V
	SH	Clear with Glare Shield	D	Dome	SL ¹	HV	120-347V
					BK ¹		

¹Extended lead time

LINE DRAWINGS & DETAILS

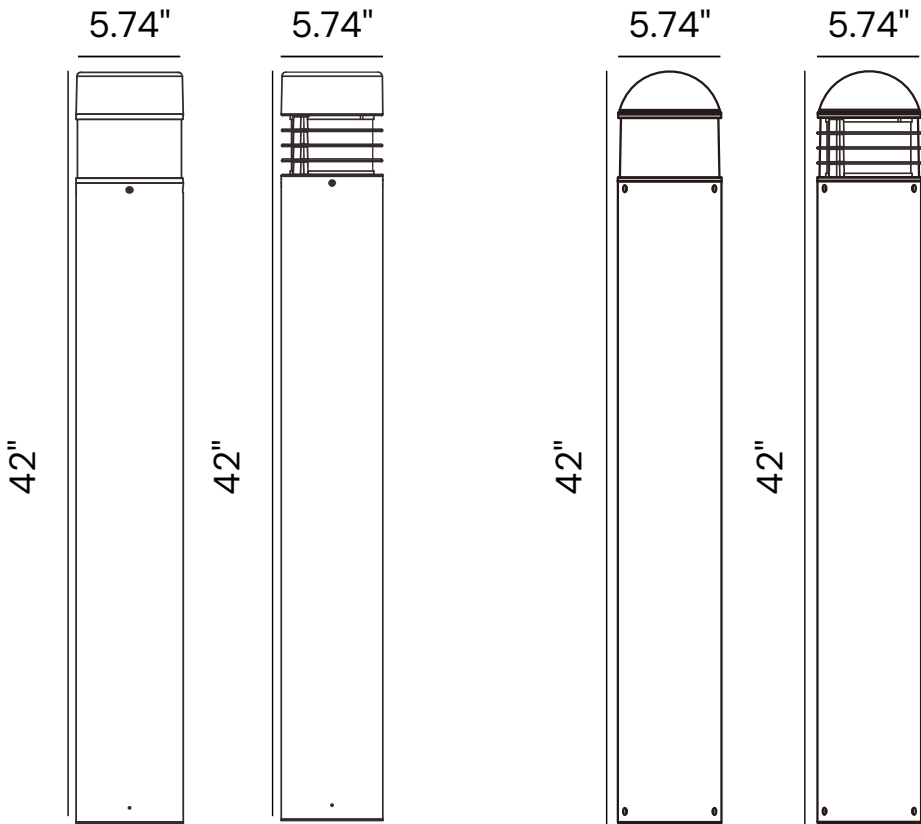

Versatile mounting holes

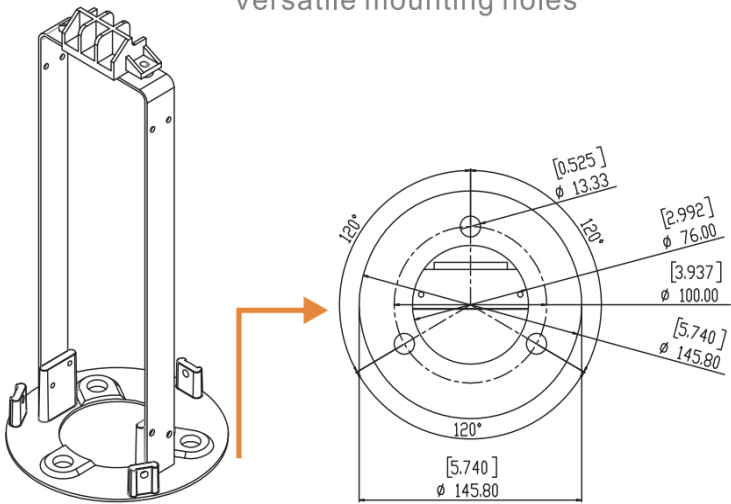

DETAILS



A terminal block is mounted on the base bracket to simplify the installation of incoming supply wires.

A quick disconnect near the terminal block allows for easy and straightforward connection to the LED driver.




Our versatile mounting plate enables quick and easy installation or replacement, making it ideal for any project or development.



Convenient access to the control switch allows selection from a range of CCTs and wattages.

AVAILABLE FINISHES

Standard

	White Gloss	Cardinal #WH04
	Black Gloss	Cardinal #BK08
	Anodized Silver	Tiger Drylac #38/91020

