

INTENDED USE

This sleek architectural bollard features a minimalist design with a open faced recessed LED light source, providing downward illumination ideal for pathways, parks, and urban environments. Its durable corrosion resistant aluminum construction and modern aesthetic make it suitable for both functional and decorative outdoor lighting applications.

FEATURES

Construction: Corrosion Resistant Aluminum
Lens: Impact-resistant polycarbonate lens
Beam Spread: 360 Degrees
Hardwired Wattage Selectable Switch: Selectable from 7W/14W/22W
Color Temperature Switch: Selectable from 30K/40K/50K
CRI: 70+
Operating Temperature: -40°F ~ +104°F
Life: 70,000 Hours
Warranty: 7 Years carefree for parts & components (Labor not included)
Listings: UL Listed, IP65, Wet Location



Wattage | Lumens

Wattage Lumens


7 Watts	770 Lumens
14 Watts	1750 Lumens
22 Watts	2420 Lumens



ORDERING INFORMATION Example: 9082-BZ-30-GFCI

Model	Finish	Height	Options
9082	BZ	14 14 Inch	EM ² Emergency Back-up Battery
	BK	30 30 Inch	OS ² Photocell
	SL		MS ² Microwave Sensor
	WH		GFCI ² Tamper-resistant GFCI receptacle
	BE		
	CC		
	Custom Finish (See Page 3)		

LINE DRAWINGS & DETAILS

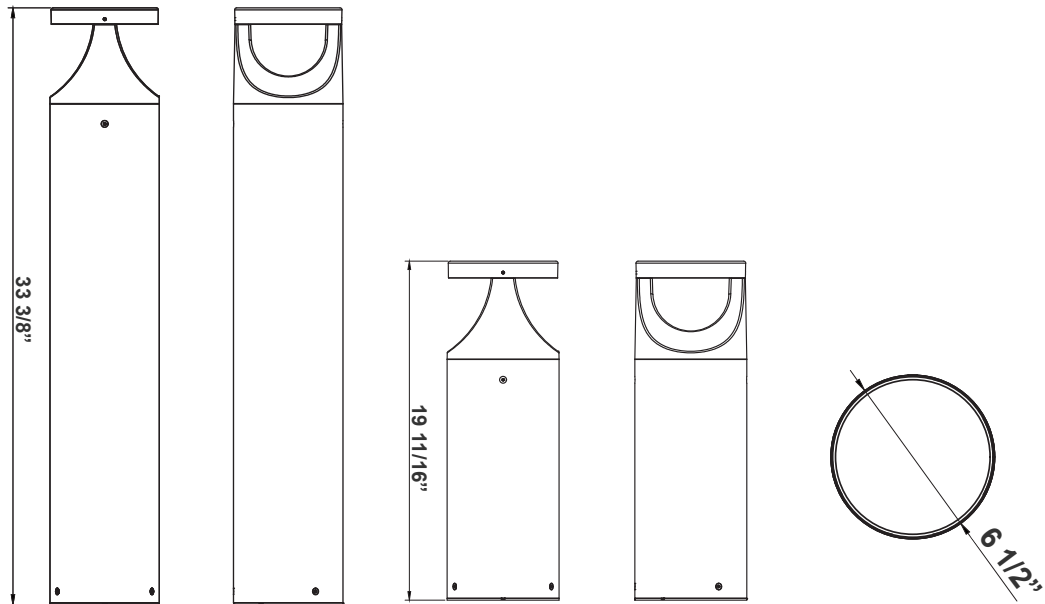

33 3/8 "(H) x 6 1/2"(D)
19 11/16 "(H) x 6 1/2"(D)

20A 125V Decorative tamper-resistant GFCI receptacle
Receptacle Rating 20A, 125VAC



LINE DRAWINGS & DETAILS


Gloss:



Hammer:





Texture:

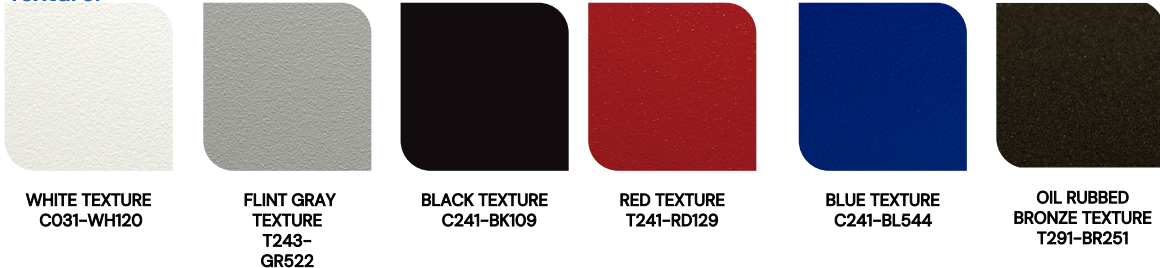


Vein:



Photometrics



BUD Rating: B1-U2-G1

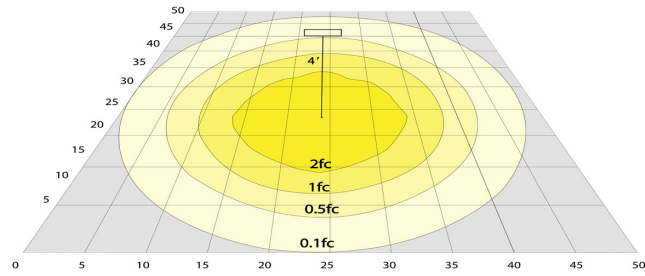

Area 75'x 65' Mounting Height: 4'

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	X	✓	✓