

INTENDED USE

Our Louvered LED Bollard delivers reliable pathway and landscape illumination with a glare-reducing horizontal louver design. Its domed top and stacked louvers direct light downward, minimizing light spill while enhancing visual comfort. Ideal for commercial, municipal, and residential applications, it combines classic styling with energy-efficient LED performance, providing long-lasting, low-maintenance lighting for walkways, parks, and public spaces.

FEATURES

- Construction: Corrosion Resistant Aluminum
- Lens: Impact-resistant polycarbonate lens
- Beam Spread: 360 Degrees
- Hardwired Wattage Selectable Switch: Selectable from 10W/18W/25W
- Color Temperature Switch: Selectable from 30K/40K/50K
- CRI: 70+
- Operating Temperature: -40°F ~ +104°F
- Life: 70,000 Hours
- Warranty: 7 Years carefree for parts & components (Labor not included)
- Listings: UL Listed, IP65, Wet Location



Wattage | Lumens

Wattage	Lumens
10 Watts	1000 Lumens
18 Watts	1800 Lumens
25 Watts	2500 Lumens










ORDERING INFORMATION Example: 9085-BZ-30

Model	Finish	Height	Options
9085	BZ	14 14 Inch	EM ² Emergency Back-up Battery
	BK	30 30 Inch	OS ² Photocell
	SL		MS ² Microwave Sensor
	WH		
	BE		
	CC		
	Custom Finish (See Page 3)		

LINE DRAWINGS & DETAILS

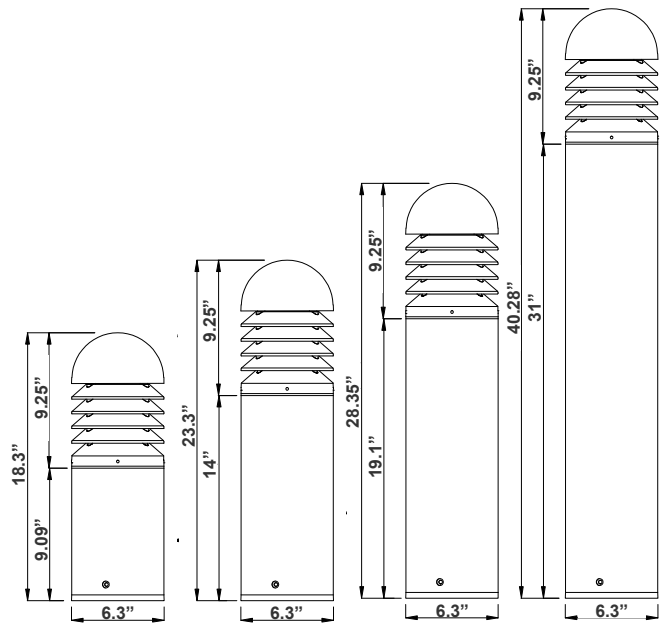

Alcon Lighting 9085 Louvered LED Bollard

COLOR TEMPERATURE GUIDE

