

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The landscape architectural LED twin path light features durable, heat-resistant lenses and a silicone-sealed gasket for protection against water, moisture, and insects. Ideal for illuminating walkways, gardens, and outdoor paths, this energy-efficient fixture provides reliable, high-quality lighting for landscape applications.


FEATURES

- Shroud:** W 2.375" x L 6.5" (9.25" fully extended)
Stem: Solid brass pipe with 1/2" NPT on bottom
Construction: Corrosion-resistant cast brass
Lens: Clear and heat-resistant flat glass
Silicone Gasket: Weather tight protection
Mounting: Standard injection molded spike with 1/2" NPT threaded female hub
Wiring: Pre-wired with 3 FT 18-2 direct burial cord
Voltage: 12V
Wattage: 5W
Color Temperature: 27/30/40/50K
Lumens: 500 lm
CRI: 80+
Life: 50,000 Hrs
Warranty: Lifetime coverage for the fixture and 2 years for the LED component (Labor not included)
Listings: cETLus Listed, Wet Location



Vertical Direction
Fixtures face outwards

Horizontal Direction
Fixtures face forward

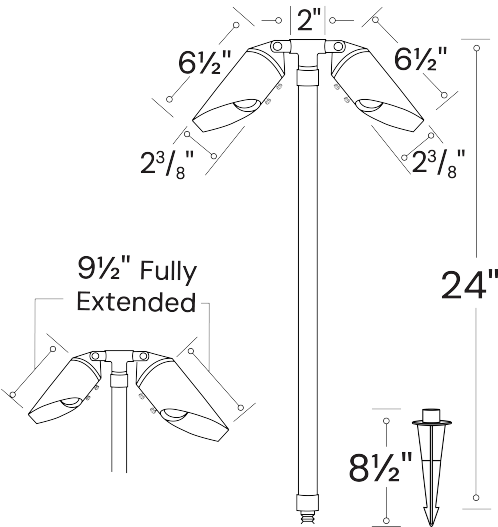

ORDERING INFORMATION Example:

Model	Direction	Stem Length	Color Temp	Finish
9106-T	H Horizontal	24 24"	27K 2700K	AB Antique Bronze
	V Vertical	18 18"	30K 3000K	GM Gun Metal
		12 12"	40K 4000K	
			50K 5000K	