



READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

PRE-INSTALLATION

1. Please exercise caution when using the lamp, as it tends to HEAT up rapidly. We recommend taking necessary safety measures to ensure optimal usage.
2. For your safety, please refrain from touching the HOT lens, guard, or enclosure. We recommend waiting for the product to cool down before handling it.
3. To prevent any fire hazards, please ensure that the lamp is kept away from materials that may easily catch fire. We appreciate your cooperation in maintaining a safe and secure environment.
4. For safety reasons, we recommend that only a qualified professional install this electrical product.
5. Before attempting to install this unit, ensure all power connections are off for your own safety.



FIXTURE(S) MUST BE INSTALLED IN ACCORDANCE WITH ALL LOCALS CODES AND ORDINANCES. DO NOT INSTALL WITHIN 10 FEET OF A POOL, SPA OR FOUNTAIN.

INSTALLATION STEPS

When installing the fixture(s), please follow these instructions carefully:

Step 1: Before installation, please ensure that the power is turned off for your safety.

Step 2: Hold the FIXTURE against the wall at the desired height and orientation. Ensure it is level and aligned according to your preferences.

Step 3: Using a pencil or marker, carefully mark the hole location on the wall.

Step 4: Select an appropriately sized for the hole, which should match the diameter of the FIXTURE.

Step 5: Position the drill on the marked spot and gently drill hole into the wall at the marked location.

Step 6: For concrete installation, to begin, construct conduit raceways inside the concrete form work by using one-inch dowels and PVC pipe before pouring the concrete. After the concrete has cured, remove the dowels and proceed to finish the outer surface of each riser if you are installing it in stairs.

Step 7: Confirm that the FIXTURE is firmly and evenly attached to the wall, without any wobbling or misalignment. Use a level to verify that the fixture is vertically aligned, as desired.



READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

Step 8: Strip the insulation, carefully strip approximately 3/4 inch (1.9 cm) of insulation from the ends of the two wires you wish to connect. Ensure that the bare metal ends are clean and free from any frayed strands.

Step 9: Align the wires, hold the stripped ends of the two wires together, aligning them neatly and ensuring that no stray strands are crossing over.


Step 10: Insert the aligned ends of the wires into the wire nut, ensuring that they go all the way in. The bare ends should be completely covered by the wire nut. Twist the wire nut: Firmly twist the wire nut clockwise onto the wires, ensuring a secure connection. Continue twisting until the wire nut is tight and snug. Test the connection: Gently tug on each wire to ensure they are securely held by the wire nut. For added safety, it is recommended to apply electrical tape around the wire nuts and wires as an extra layer of protection.

Step 11: Place the FIXTURE against the wall, aligning the hole you created.

Step 12: Remember to test the fixture after making any adjustments to ensure it is functioning correctly and that the lighting is set to your preferences.

Step 13: Once the fixture(s) have been installed securely, it's time to turn on the power and enjoy the enhanced lighting experience! Locate the power switch or breaker that controls the fixture(s) and turn it on. Take a moment to observe the lighting effect.

Remember to regularly maintain and clean the fixture(s) to ensure optimal performance and longevity. Refer to the manufacturer's instructions for specific details on how to care for your particular fixture.

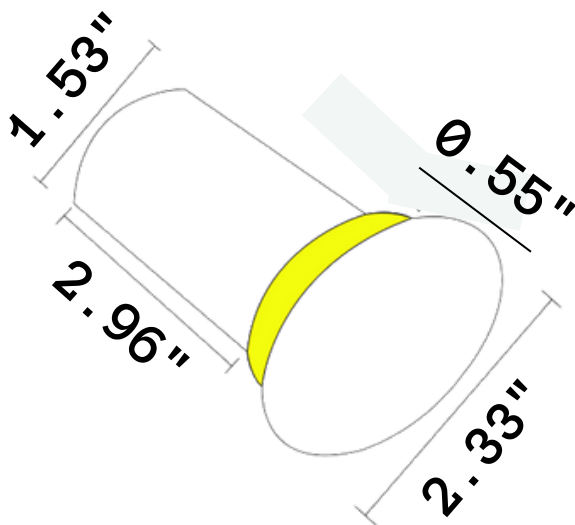

MAIN LINE

Attach the wires from the fixture(s) to the main cable, For best results, we recommend using waterproof wire nuts.