

IMPORTANT SAFETY INFORMATION

- Disconnect power at the circuit breaker before installation or maintenance.
- Installation should be performed by a qualified electrician in accordance with local and national electrical codes.
- Verify that the supply voltage matches the fixture rating (120V).

TOOLS & MATERIALS

- Measuring tape
- Level
- Hole saw or drywall saw
- Wire connectors
- Phillips screwdriver
- Electrical tape

INSTALLATION STEPS

1. Prepare the Opening

- Cut a hole in the wall sized to fit the housing.
- Recommended opening: approximately 3.9" (H) x 8.9" (W) x 2.5" (D).
- Ensure the opening is clean and free of debris.

2. Power Connection

- Pull the electrical supply wires through the wall opening.
- Connect the fixture wires to the supply wires:
- Black → Line (Hot)
- White → Neutral
- Green or Bare → Ground
- Secure all connections with wire connectors and wrap with electrical tape.

3. Mount the Housing



- Insert the fixture housing into the wall opening.
- Ensure it sits flush with the wall surface.
- Secure in place using screws provided or appropriate wall anchors (depending on wall material).

4. Install the Faceplate

- Align the faceplate with the housing and tighten the screws evenly.
- Make sure the lens is properly seated to maintain a weather-resistant seal.

5. Power On

- Restore power at the breaker.
- Test the fixture to ensure proper operation.

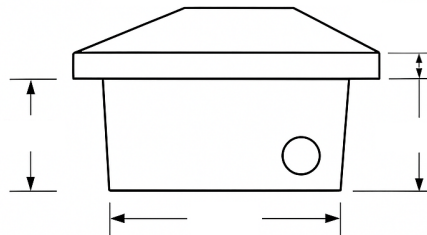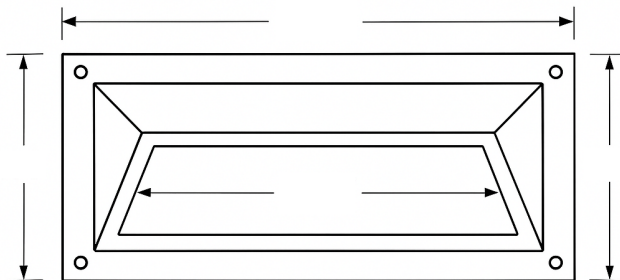

MAINTENANCE

- Periodically clean the lens with a soft cloth and mild soap solution.
- Check electrical connections annually for signs of wear or corrosion.