


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

With the capability to tune color temperature, our simple yet elegant chandelier affords both uplighting and downlighting. Adding versatility to the trading space, such as retailers, as well as conference rooms, offices, hotels and restaurants, the dimmable suspended product yields from 100 to 277 volts. For optimal color control consistency, this product works best within series S.

FEATURES

- Construction:** Seamless Aluminum Frame
- Color Temperature Switch:** Capable of delivering 3000K, 3500K & 4000K Color Temperatures. Color Temperature Tuning (from 3K to 4K), RGBW-3K & RGBW-4K Available. For optimal color control consistency, this product works best within series S.
- Lens:** High Transmittance Acrylic
- Voltage:** 100-277V
- Power factor:** ≥0.90
- CRI:** 90+
- Dimming:** 0-10V Dimmable
- Life:** 100,000-hour
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cULus, FCC listed, RoHS compliant, Dry location.

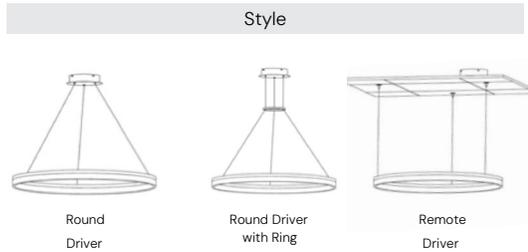


Ordering code example:


Model	Light Distribution	Rings	Color Temp	Dimming Control	Style	Finish	Mounting	Options						
12279	I Inside	1 Tier	CS Standard Color Temperature Switch 3000K, 3500K & 4000K	O10 Standard 0-10V Dimming	A Round Driver	Standard	AC10 Standard 10 foot Adjustable Aircraft Cable	CCT-C Color Temperature Tuning Wall Control <i>More information on Pg 4</i>						
		1-32 (32" 40 Watts 2880 Lumen)												
	O Outside	1-40 (40" 50 Watts 3600 Lumen)	CCT¹ Color Temperature Tuning From 3000K to 4000K	TRI Triac/ELV Dimming	B Round Driver with Ring	BK Black	AC5 5 Foot Adjustable Aircraft Cable	RGB-C RGBW Wall Control <i>More information on Pg 4</i>						
		1-48 (48" 60 Watts 4320 Lumen)												
		1-60 (60" 70 Watts 5040 Lumen)												
		1-72 (72" 80 Watts 5760 Lumen)												
		2 Tier							RGBW3K¹ RGBW + 3000K Color Temp	DMX DMX	D Remote Driver	SL Silver	AC15 15 Foot Adjustable Aircraft Cable	RGB/CCT-R RGBW / Color Temperature Handheld Remote <i>More information on Pg 4</i>
		2-32 (32" x 40" 90 Watts 6480 Lms)												
		2-40 (40" x 48" 110 Watts 7920 Lms)												
	3-48 (48" x 60" 200 Watts 14400 Lms)	RGBW4K¹ RGBW + 4000K Color Temp	ZB ZigBee Control	RE Fire Engine Red	AC20 20 Foot Adjustable Aircraft Cable	XEM5 5 Watt External Emergency Backup Battery								
							3-40 (40" x 48" 110 Watts 7920 Lms)							
							3-48 (48" x 60" 200 Watts 14400 Lms)							
	4-40 (40" x 48" 250 Watts 18000 Lms)	Plated	PL Platinum	RG Rose Gold	AC20 20 Foot Adjustable Aircraft Cable	XEM10 10 Watt External Emergency Backup Battery								
							4-32 (32" x 40" 90 Watts 6480 Lms)							
							4-40 (40" x 48" 110 Watts 7920 Lms)							
5 Tier							BG Burnished Gold	XEM17 17 Watt External Emergency Backup Battery						
5-32 (32" x 40" 90 Watts 6480 Lms)														
5-40 (40" x 48" 110 Watts 7920 Lms)														
5-48 (48" x 60" 200 Watts 14400 Lms)														

¹ Must be paired with DMX or ZigBee Driver


1 TIER

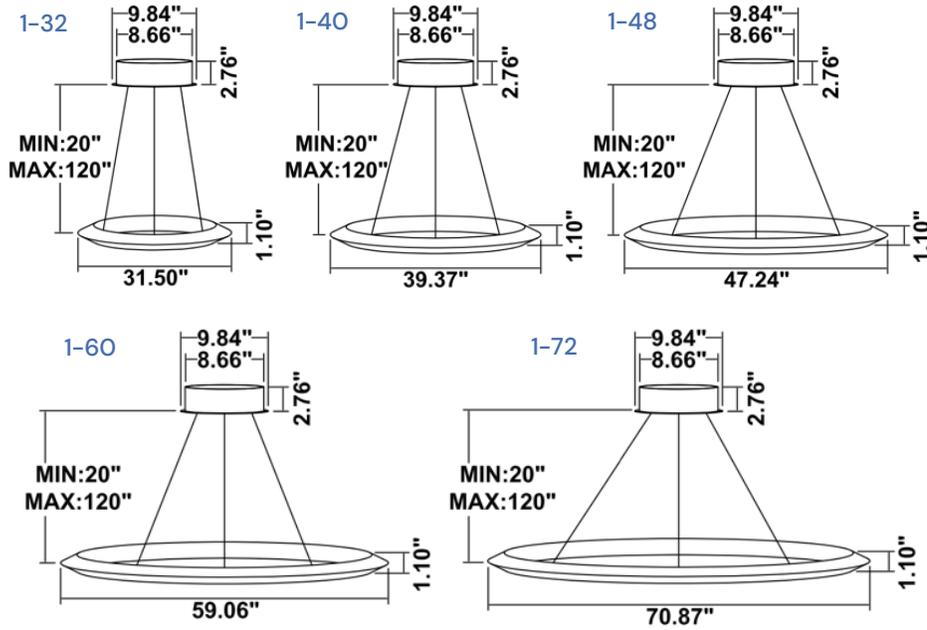


2 TIER

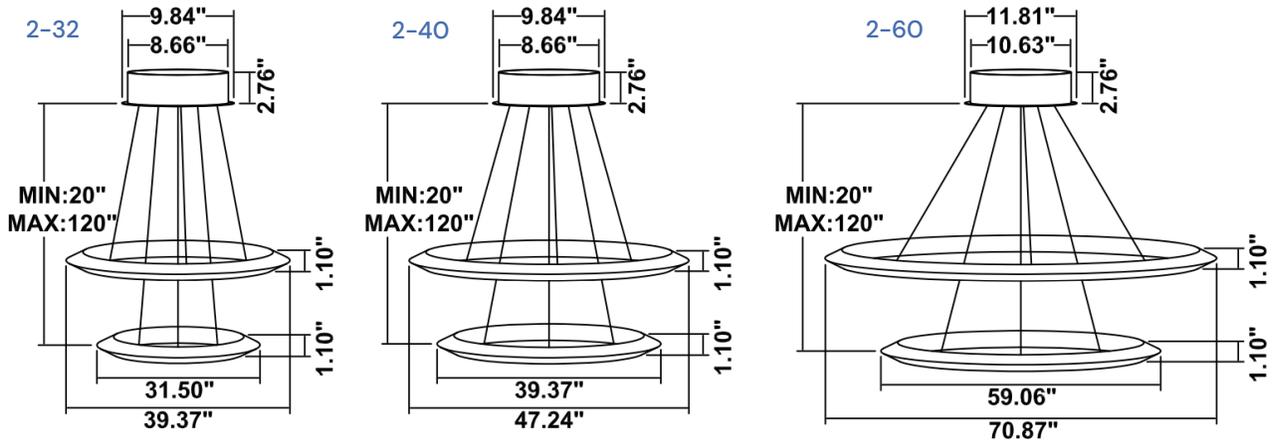


3 TIER

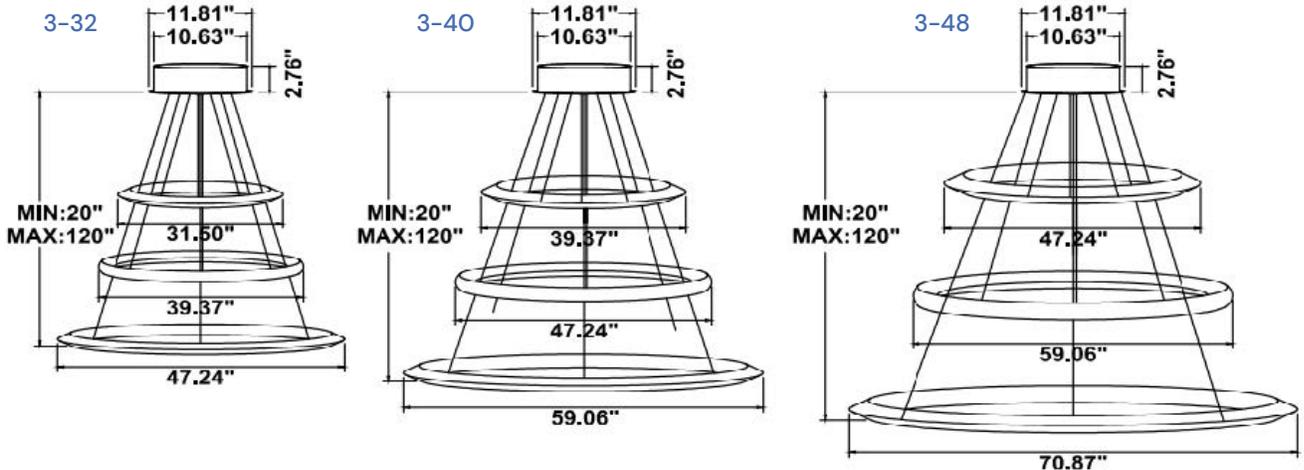


4 TIER

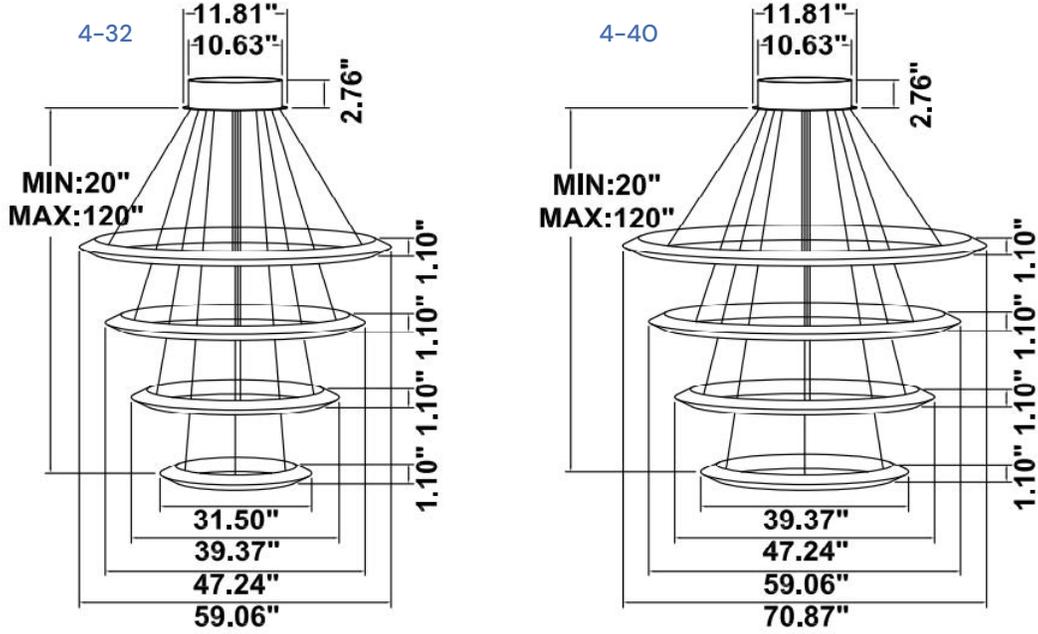

5 TIER

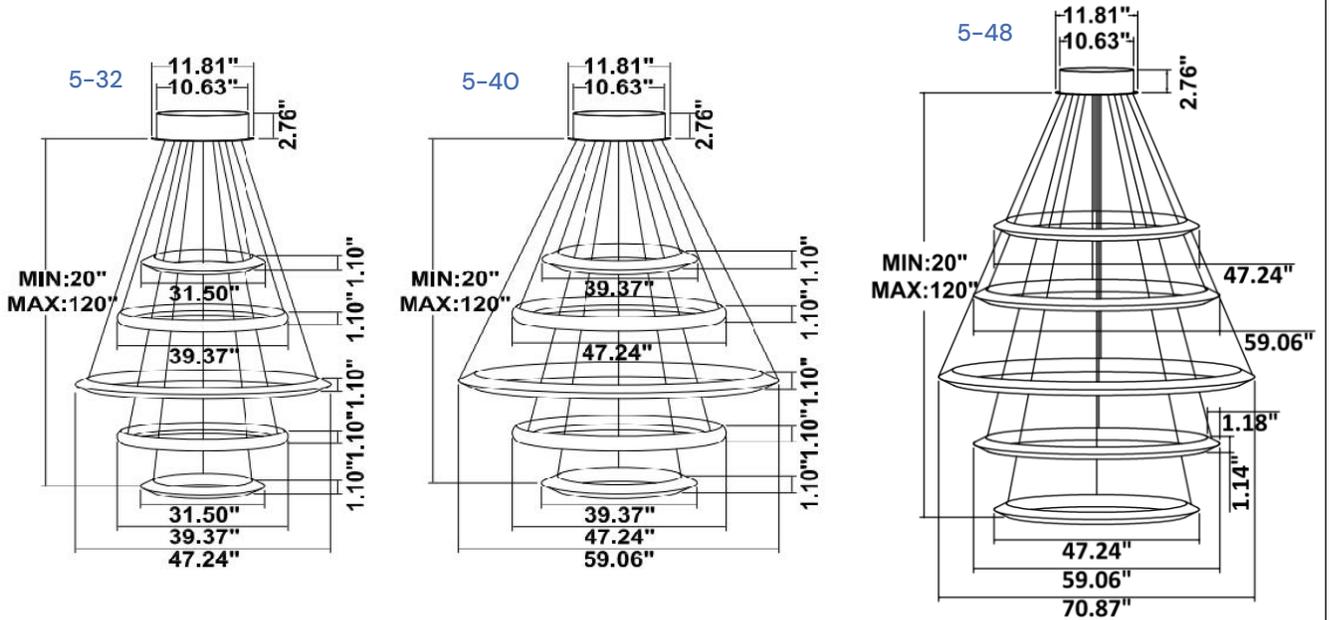

Control	DMX Compatible	ZigBee Compatible
 <p>CCT Wall Control</p>	✓	✓
 <p>RGBW Wall Control</p>	✓	✓
 <p>RGBW/CCT Handheld Remote Control</p>	✗	✓
 <p>Alexa Echo Plus, Google Home & other smart Speakers <i>Device must be Zigbee 8.0 Compatible</i></p>	✗	✓
 <p>iOS / Android Application <i>Alexa Echo Plus, Google Home or other ZigBee 8.0 Compatible smart speaker needed for operation</i></p>	✗	✓

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X