Shop Now

SPECIFICATION SHEET

INTENDED USE

The LED-VISOR38 Directional Spot Light with Hood is built for accent and landscape lighting that needs aiming flexibility. A 4.00" hood overhang shields the lamp, and the adjustable knuckle lets installers aim the beam at trees, building features, signage and walkways. Available with an incandescent PAR38 lamp or with a factory-included LED PAR38 flood, LED PAR38 spot, or A23 RGBW lamp.



FEATURES

Construction: Powder coated cast aluminum housing
Lens: Clear, heat resistant, tempered glass
Finish: Black, Bronze, Green, Verde Green
Hood: 4.00" hood overhang
Mounting: Adjustable knuckle with 1/2" NPT
Ground Spike: LV-S6 available (sold separately)
Lamp: PAR38, 90W maximum (incandescent); LED options listed below
Voltage: 120V (PAR38 incandescent); 120-277V (PAR38 LED); 85-265V (RGBW)
RGBW Control: Requires remote P-RMT-MR16-LED-4W-MC (sold separately)
Wire Length: Approximately 5.0"
Weight: 2.8 lbs
Listings: ETL approved

ORDERING INFORMATION


MODEL NUMBER	LAMP TYPE	ILLUMINANT TYPE	WATTS (W)	VOLTS (V)	LAMP(S) INCLUDED?
LED-VISOR38	PAR38	Incandescent	90 (max)	120	No
LED-VISOR38-LED18F	PAR38-LED	LED Flood	18	120-277	Yes
LED-VISOR38-LED18S	PAR38-LED	LED Spot	18	120-277	Yes
LED-VISOR38-LED12-RGBW	A23-LED	LED (RGBW)	12	85-265	Yes

Finish options: Black, Bronze, Green, Verde Green. **Accessories (sold separately):** LV-S6 ground spike; P-RMT-MR16-LED-4W-MC remote (required for RGBW lamp).

Project Name: _____ Type: _____ Quantity: _____

Rev: 11/15/26

LINE DRAWINGS

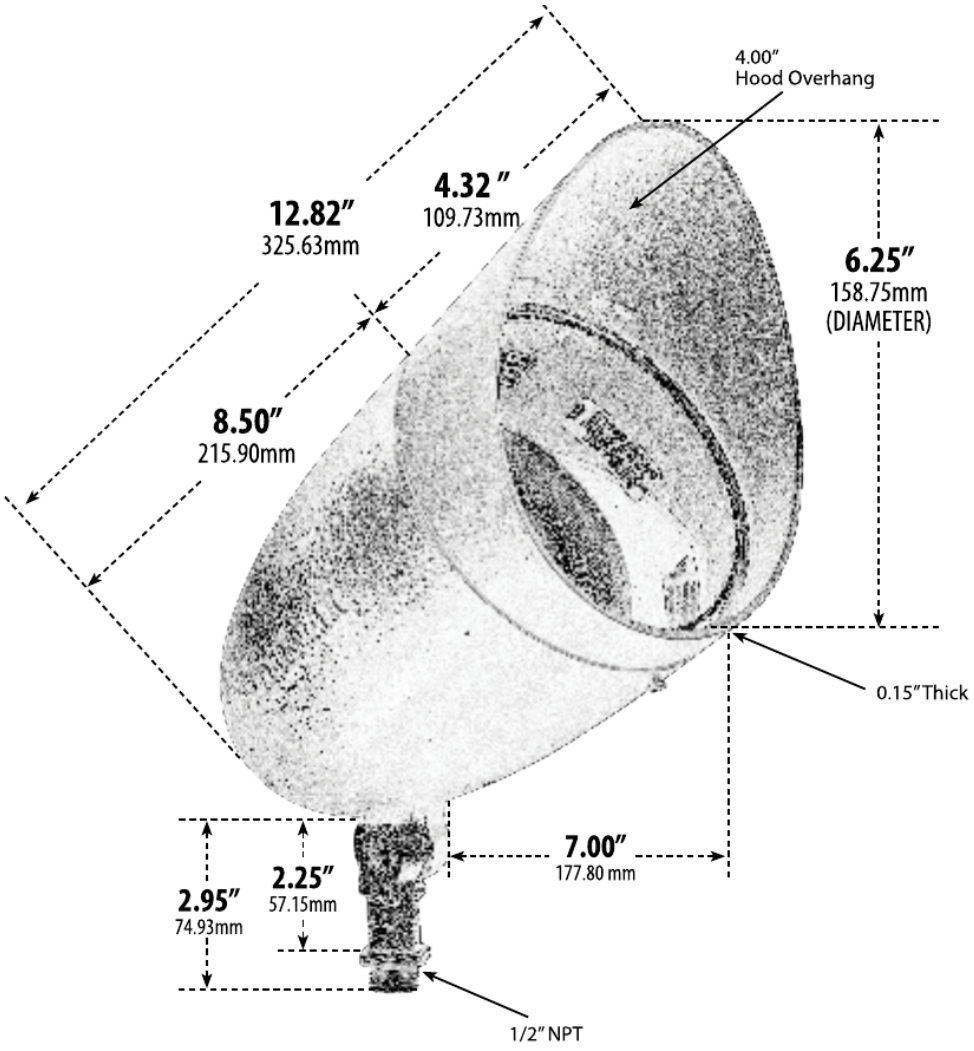

Overall Dimensions
8.25"H x 6.25"W x 13.00"D

Shipping
Weight: 2.8 lbs
Box: 13.00"H x 6.38"W x 6.38"D

STRUCTURAL DESIGN

Maximum Height	Minimum Height	Width	Maximum Depth	Minimum Depth	Approx. Wire Length	Weight
15.00"	8.25"	6.25"	13.00"	7.50"	5.0"	2.8 lbs

MOUNTING OPTIONS

Mount	Details
Adjustable Knuckle	Adjustable, 1/2" NPT
Ground Spike	LV-S6 (sold separately)

ELECTRICAL DATA

Model	Watts	Volts
LED-VISOR38	90 max	120
LED-VISOR38-LED18F	18	120-277
LED-VISOR38-LED18S	18	120-277
LED-VISOR38-LED12-RGBW	12	85-265

RGBW LAMP CONTROL

The RGBW lamp (LED-VISOR38-LED12-RGBW) requires remote P-RMT-MR16-LED-4W-MC, sold separately.