


RING

STATIC COLOR DIRECT & WHITE LED INDIRECT ILLUMINATION

WEB PIN™ 207

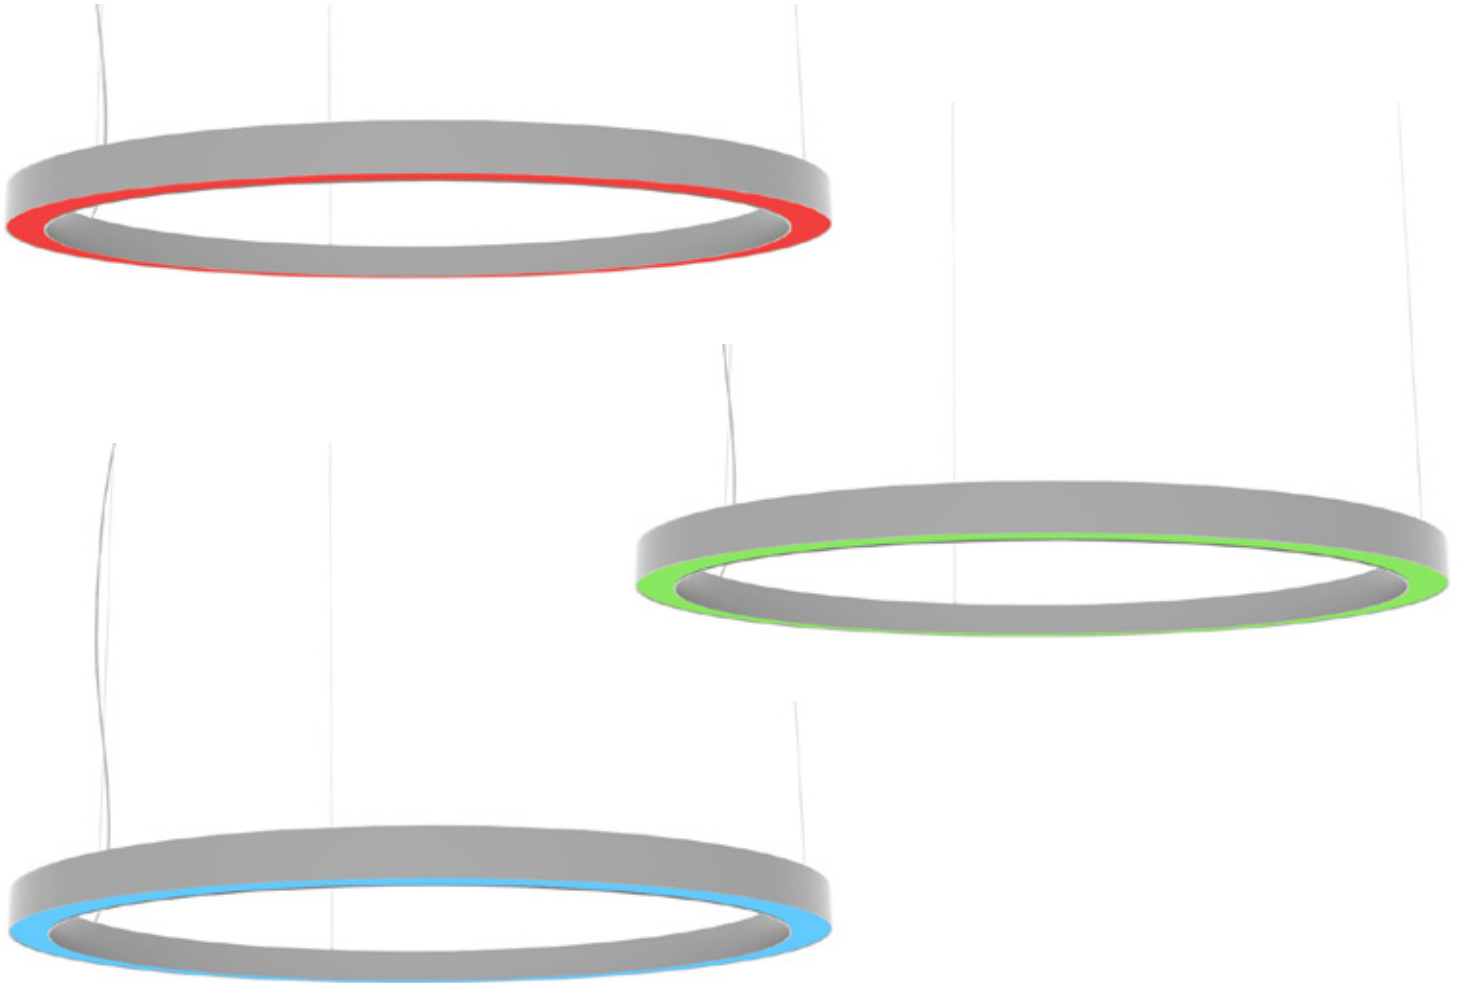

GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Top cover plate: White powder coated steel.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffusers: Opal polycarbonate, supplied in sections.


Drivers: Integral, HPF electronic drivers for 120-277V, 0-10V, 1% dimming standard.

Mechanical: Luminaires mount directly over J box (by others).

Approvals: ETL

Ring DIA:	Supplied sections:	Suspension points:	Total weight:
610mm/24"	1	3	8Kg/18lbs
914mm/36"	1	3	12Kg/26lbs
1219mm/48"	1	3	15Kg/35lbs
1524mm/60"	1	3	19Kg/42lbs
1829mm/72"	1	3	24Kg/52lbs
2133mm/84"	1	6	27Kg/60lbs
2438mm/96"	3	6	32Kg/69lbs
2743mm/108"	3	6	34Kg/75lbs
3657mm/144"	4	8	46Kg/102lbs
5486mm/216"	6	12	69Kg/152lbs

Ring luminaires are supplied in several sections for assembly on site. Luminaires are pre-wired and connect electrically and mechanically.



RING

STATIC COLOR DIRECT & WHITE LED INDIRECT ILLUMINATION

WEB PIN™ 207

A SPECIFY LAMP/LUMINAIRE TYPE

Code:	Diameter (A):	Color CCT:	Indirect Power*:	Indirect lms:	Indirect LPW:	L70 @25°C (77°F):	Photometry:
95 0400	610mm/24"	3000K	22W LED	2492	113	> 50,000 hrs	File# 950400
95 0401	610mm/24"	4000K	22W LED	2572	117	> 50,000 hrs	File# 950401
95 0410	914mm/36"	3000K	42W LED	5024	117	> 50,000 hrs	File# 950410
95 0411	914mm/36"	4000K	42W LED	5186	121	> 50,000 hrs	File# 950411
95 0470	1219mm/48"	3000K	42W LED	5024	117	> 50,000 hrs	File# 950470
95 0471	1219mm/48"	4000K	42W LED	5186	121	> 50,000 hrs	File# 950471
95 0420	1524mm/60"	3000K	72W LED	8444	117	> 50,000 hrs	File# 950420
95 0421	1524mm/60"	4000K	72W LED	8716	121	> 50,000 hrs	File# 950421
95 0480	1829mm/72"	3000K	72W LED	8444	117	> 50,000 hrs	File# 950480
95 0481	1829mm/72"	4000K	72W LED	8716	121	> 50,000 hrs	File# 950481
95 0430	2133mm/84"	3000K	115W LED	14166	123	> 50,000 hrs	File# 950430
95 0431	2133mm/84"	4000K	115W LED	14623	127	> 50,000 hrs	File# 950431
95 0490	2438mm/96"	3000K	115W LED	14166	123	> 50,000 hrs	File# 950490
95 0491	2438mm/96"	4000K	115W LED	14623	127	> 50,000 hrs	File# 950491
95 0440	2743mm/108"	3000K	129W LED	15301	119	> 50,000 hrs	File# 950440
95 0441	2743mm/108"	4000K	129W LED	15795	122	> 50,000 hrs	File# 950441
95 0450	3657mm/144"	3000K	173W LED	19951	115	> 50,000 hrs	File# 950450
95 0451	3657mm/144"	4000K	173W LED	20595	119	> 50,000 hrs	File# 950451
95 0460	5486mm/216"	3000K	295W LED	35712	121	> 50,000 hrs	File# 950460
95 0461	5486mm/216"	4000K	295W LED	36864	125	> 50,000 hrs	File# 950461

B SPECIFY DIRECT COLOR LED

- RD** Red
- BL** Blue
- GN** Green

C SPECIFY SUSPENSION

- S1** Type A
- S2** Type B (not available with 2743mm/108" DIA or larger)

D SPECIFY FINISH

- WH** White
- MS** Metallic silver

E SPECIFY OPTIONS

- OD** Opal diffuser for uplight
- SS** Seperate switching (two power cables supplied)

Example Specification Code: **95 0410 • RD • S1 • WH**

* For direct power see RING Static Color Direct - WEB PIN™ 296

